


AMAH-IE3 132MX2 (B14L)

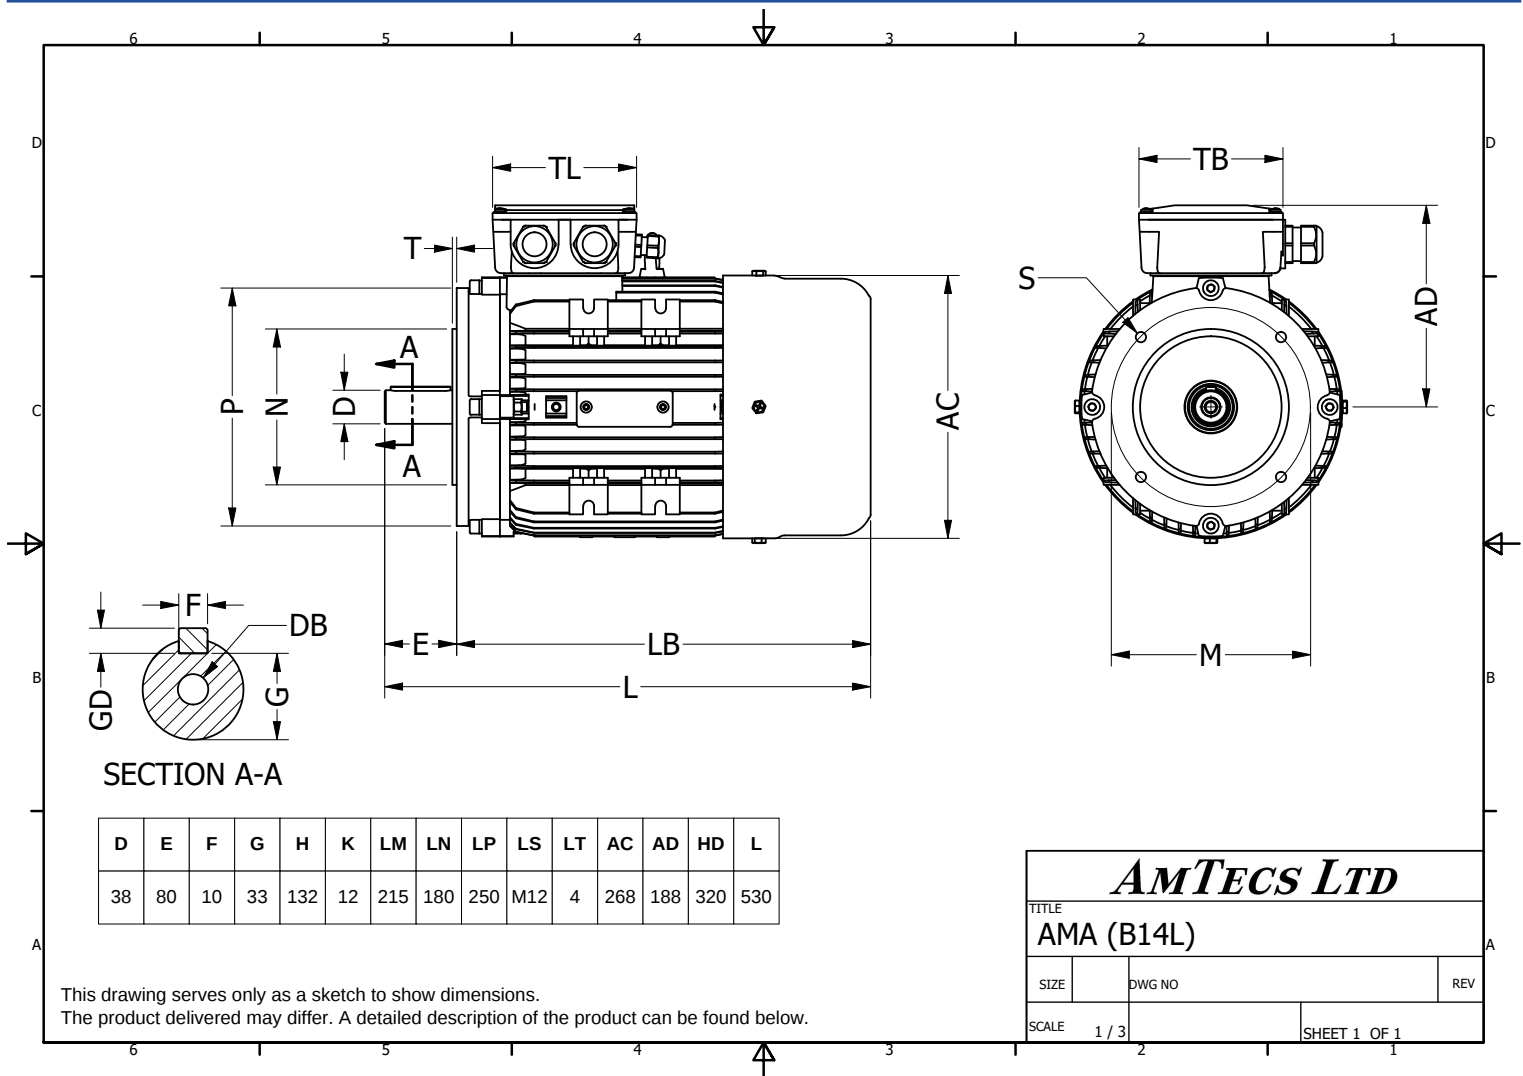

Specification
Manufacturer
Motor type
Rated power
Speed
Voltage
Frequency
Connection
Full load current
No-load current
Enclosure
Insulation class
Max. ambient temp
Max. altitude
Comment
Cable entry
Construction
Weight
Type number
Warranty

IEC 60034-1
AmTecs
AMAH-IE3 132MX2
11 kW S1 Duty
2945 rpm
400V / 690V
50 Hz
Delta / Star
19.6 A / 11.32 A
IP55
F (temp. rise B)
40 °C
1000 mtr above sea level
M25 x 1.5
Aluminium
77 Kg
PTC 150

Efficiency class
Load data
Efficiency
Power factor
Sound pressure level (1m)
Resistance R20 (open)
Resistance R20 (Delta)
Full load torque
Starting / Full load torque
Pull up / Full load torque
Pull out / Full load torque
Starting / Full load current (DOL)
Starting / Full load current (Y/D)
Rotor Inertia
Bearing DE
Bearing NDE

IE3
100%
91.2 %
0.88
70 dB(A)
35.7 Nm
2.2
3.6
8.8
6308
6308

MM Engineering Services Ltd
Unit 32
Bradford Chamber Business Park
Bradford, BD4 8BX
Tel: +44 (0) 1274 288777

sales@mmengservices.co.uk
www.mmengservices.co.uk