


AMAH-IE3 100L4 (B3)

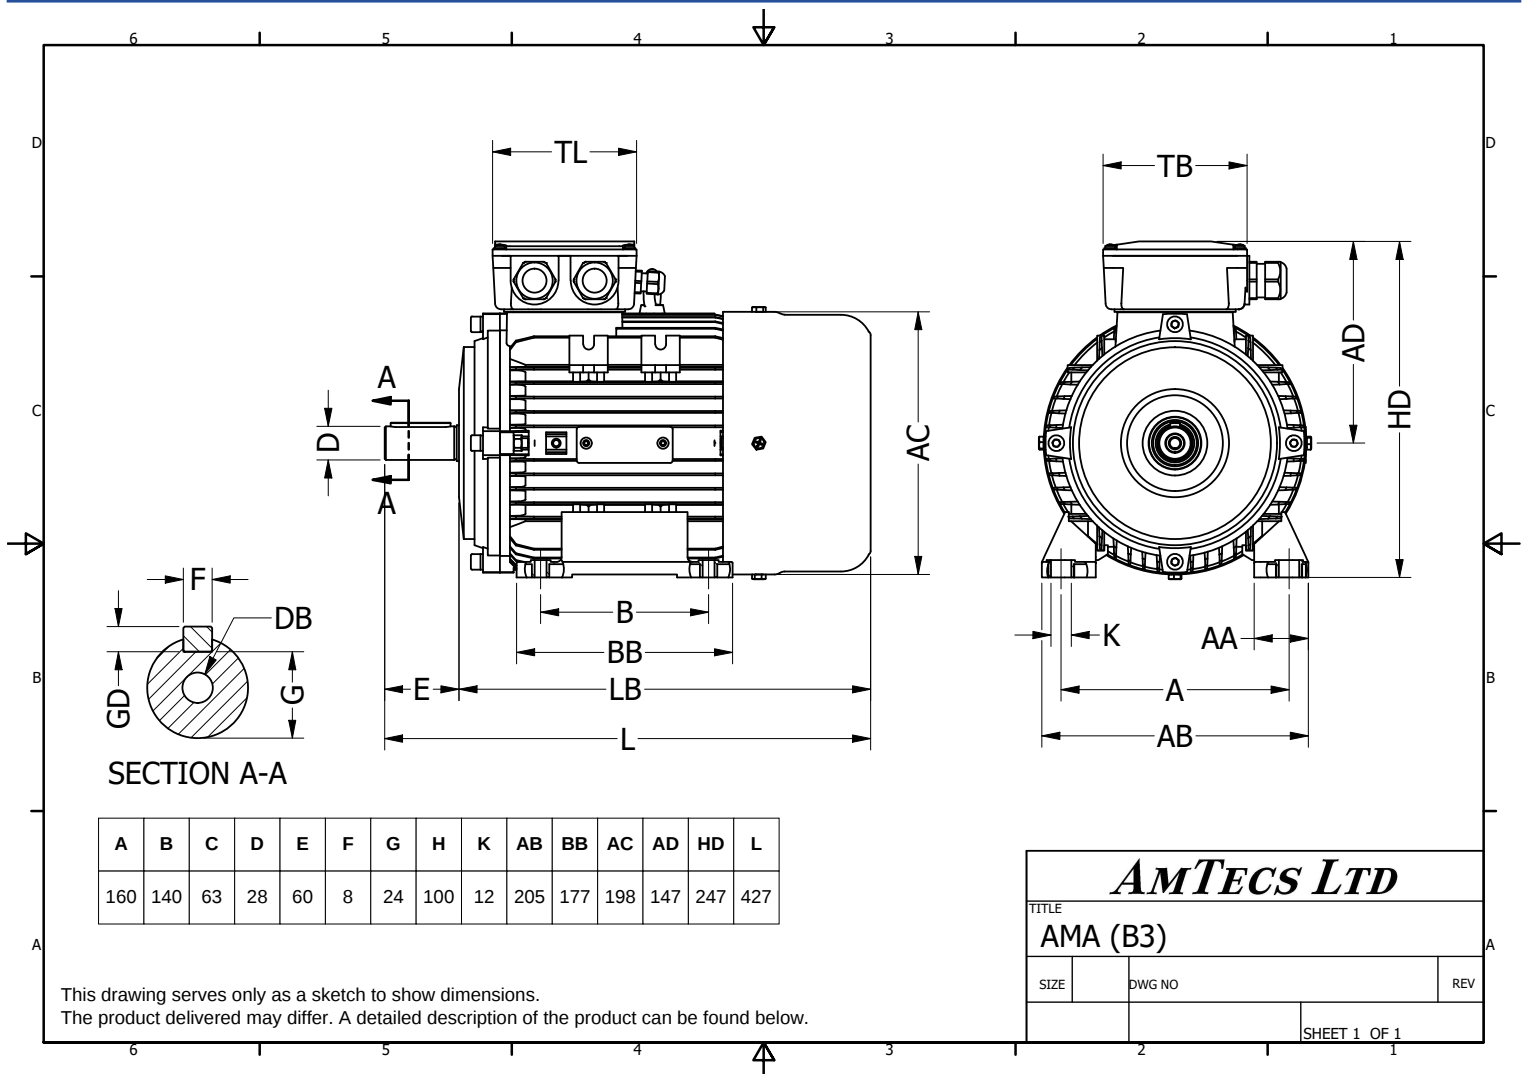

Specification **IEC 60034-1**
Manufacturer **AmTecs**
Motor type **AMAH-IE3 100L4**
Rated power **4 kW S1 Duty**
Speed **1455 rpm**
Voltage **400V / 690V**
Frequency **50 Hz**
Connection **Delta / Star**
Full load current **7.95 A / 4.59 A**
No-load current
Enclosure **IP55**
Insulation class **F (temp. rise B)**
Max. ambient temp **40 °C**
Max. altitude **1000 mtr above sea level**
Comment
Cable entry **M20 x 1.5**
Construction **Aluminium**
Weight **36 Kg**
Type number
Warranty

Efficiency class **IE3**
Load data **100%**
Efficiency **88.6 %**
Power factor **0.82**
Sound pressure level (1m) **56 dB(A)**
Resistance R20 (open)
Resistance R20 (Delta)

Full load torque **26.3 Nm**
Starting / Full load torque **2.5**
Pull up / Full load torque
Pull out / Full load torque **3**

Starting / Full load current (DOL) **8.8**
Starting / Full load current (Y/D)
Rotor Inertia
Bearing DE **6206**
Bearing NDE **6206**

Protection Device **PTC 150**

MM Engineering Services Ltd Unit 32 Bradford Chamber Business Park Bradford, BD4 8BX Tel: +44 (0) 1274 288777	
	sales@mmengservices.co.uk www.mmengservices.co.uk