AMA3-IE3 100LX4 (B34S)

AMTECS

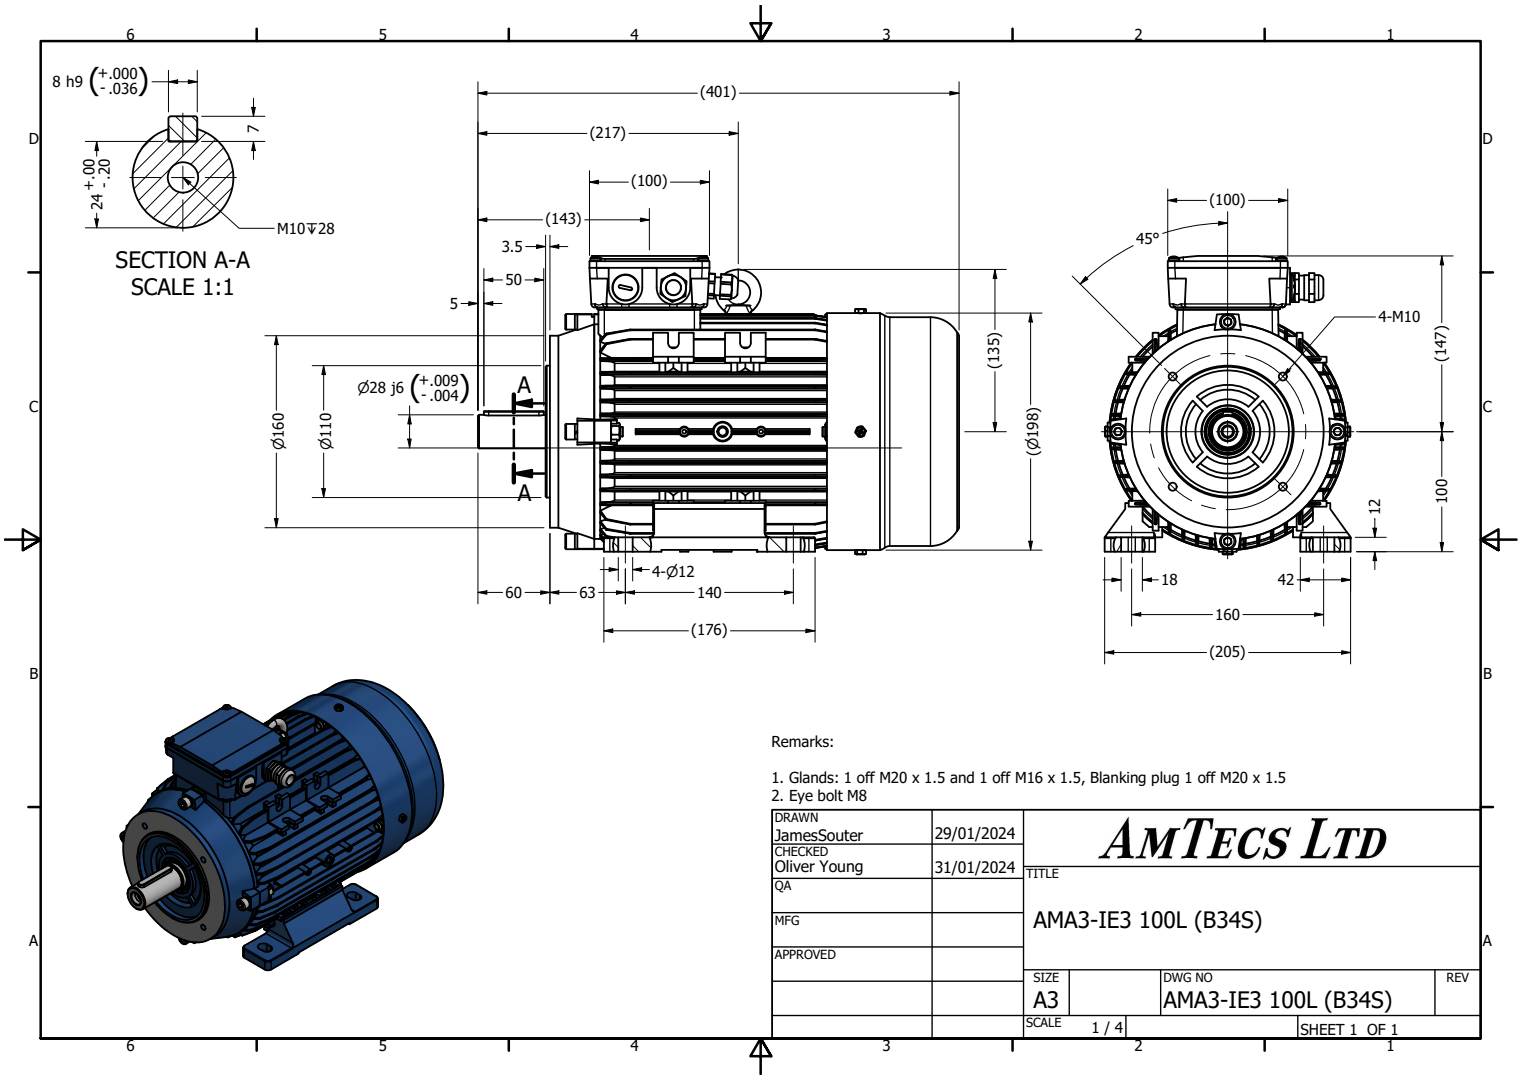

Remarks:

1. Glands: 1 off M20 x 1.5 and 1 off M16 x 1.5, Blanking plug 1 off M20 x 1.5
2. Eye bolt M8

DRAWN	JamesSouter	29/01/2024
CHECKED	Oliver Young	31/01/2024
QA		
MFG		
APPROVED		

AMTECS LTD

TITLE: AMA3-IE3 100L (B34S)

SIZE: A3 | DWG NO: AMA3-IE3 100L (B34S) | REV

SCALE: 1 / 4 | SHEET 1 OF 1

Specification	**IEC 60034-1**	Efficiency class	**IE3**
Manufacturer	**AmTecs**	Load data	100%
Motor type	**AMA3-IE3 100LX4**	Efficiency	**87.7** %
Rated power	**3** kW **S1** Duty	Power factor	**0.82**
Speed	**1450** rpm	Sound pressure level (1m)	**56** dB(A)
Voltage	**220V / 400V**	Resistance R20 (open)	
Frequency	**50** Hz	Resistance R20 (Delta)	
Connection	**Delta / Star**		
Full load current	**10.5 A / 6.02 A**	Full load torque	**19.8** Nm
No-load current		Starting / Full load torque	**3.2**
Enclosure	**IP55**	Pull up / Full load torque	
Insulation class	**F (temp. rise B)**	Pull out / Full load torque	**3.7**
Max. ambient temp	**40** °C		
Max. altitude	**1000** mtr above sea level		
Comment			
Cable entry	**M20 x 1.5**	Starting / Full load current (DOL)	**8.8**
Construction	**Aluminium**	Starting / Full load current (Y/D)	
Weight	**38.5** Kg	Rotor Inertia	
Type number		Bearing DE	**6206**
Warranty		Bearing NDE	**6206**

AmTecs Ltd
Charnham Park, Hungerford
Berkshire, RG17 0YT
Tel: +44 (0) 1488 686970
Fax: +44 (0) 1488 686968
sales@amtecs.co.uk
www.amtecs.co.uk

We make all efforts to better our products. Versions, technical data and figures could be changed therefore. They are not binding before written confirmation.