


AM3H-IE3 200L4 (B3)

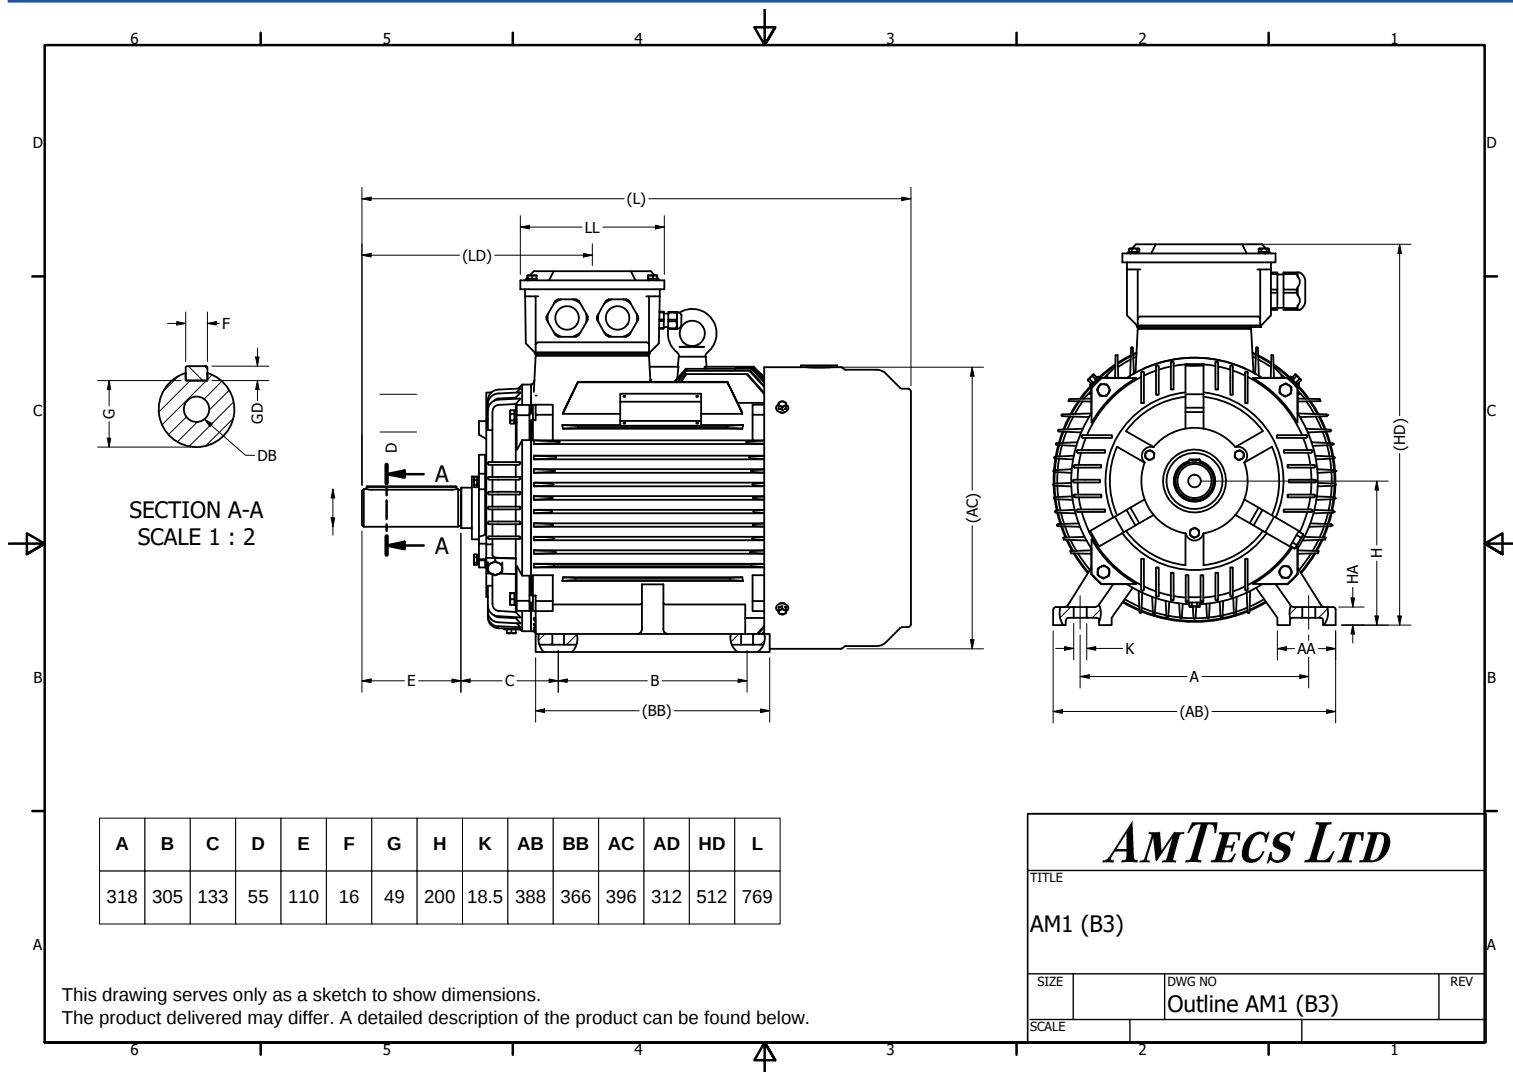

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AM3H-IE3 200L4
Rated power	37 kW S1 Duty
Speed	1485 rpm
Voltage	400V / 690V
Frequency	50 Hz
Connection	Delta / Star
Full load current	97.6 A / 56.34 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M40 x 1.5
Construction	Cast Iron
Weight	285 Kg
Type number	
Warranty	

Efficiency class	IE3
Load data	100%
Efficiency	94.6 %
Power factor	0.86
Sound pressure level (1m)	70 dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	

Full load torque	238	Nm
Starting / Full load torque	2.6	
Pull up / Full load torque		
Pull out / Full load torque	3.2	

Starting / Full load current (DOL)	8.5
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6312
Bearing NDE	6312

Protection Device **PTC 150**

MM Engineering Services Ltd	
Unit 32	
Bradford Chamber Business Park	
Bradford, BD4 8BX	
Tel: +44 (0) 1274 288777	
sales@mmengservices.co.uk	
www.mmengservices.co.uk	