


AM3H-IE3 225MX4 (B35)

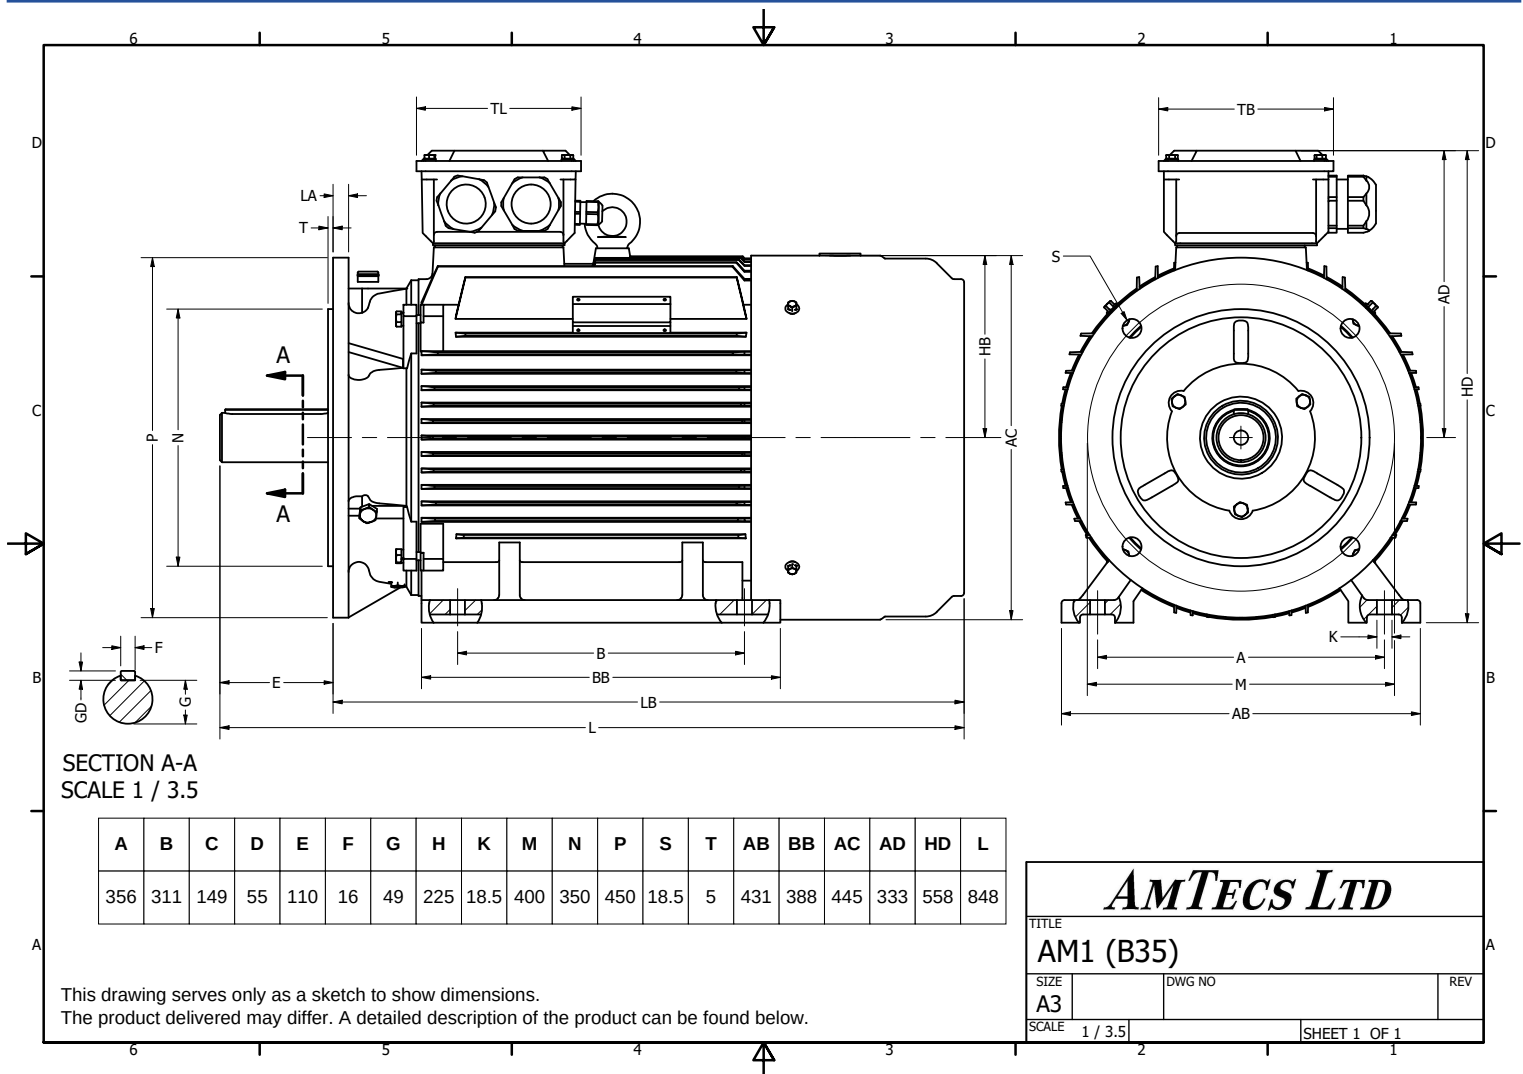

Specification IEC 60034-1
Manufacturer AmTecs
Motor type AM3H-IE3 225MX4
Rated power 55 kW S1 Duty
Speed 1485 rpm
Voltage 400V / 690V
Frequency 50 Hz
Connection Delta / Star
Full load current 97.6 A / 56.6 A
No-load current
Enclosure IP55
Insulation class F (temp. rise B)
Max. ambient temp 40 °C
Max. altitude 1000 mtr above sea level
Comment
Cable entry M40 x 1.5
Construction Cast Iron
Weight 358 Kg
Type number
Warranty

Efficiency class IE3
Load data 100%
Efficiency 94.6 %
Power factor 0.86
Sound pressure level (1m) 71 dB(A)
Resistance R20 (open)
Resistance R20 (Delta)
Full load torque 354 Nm
Starting / Full load torque 2.6
Pull up / Full load torque
Pull out / Full load torque 3
Starting / Full load current (DOL) 8.5
Starting / Full load current (Y/D)
Rotor Inertia
Bearing DE 6313
Bearing NDE 6312

Protection Device PTC 150

MM Engineering Services Ltd
Unit 32
Bradford Chamber Business Park
Bradford, BD4 8BX
Tel: +44 (0) 1274 288777

sales@mmengservices.co.uk
www.mmengservices.co.uk