


AM3-IE3 160M6 (B35)

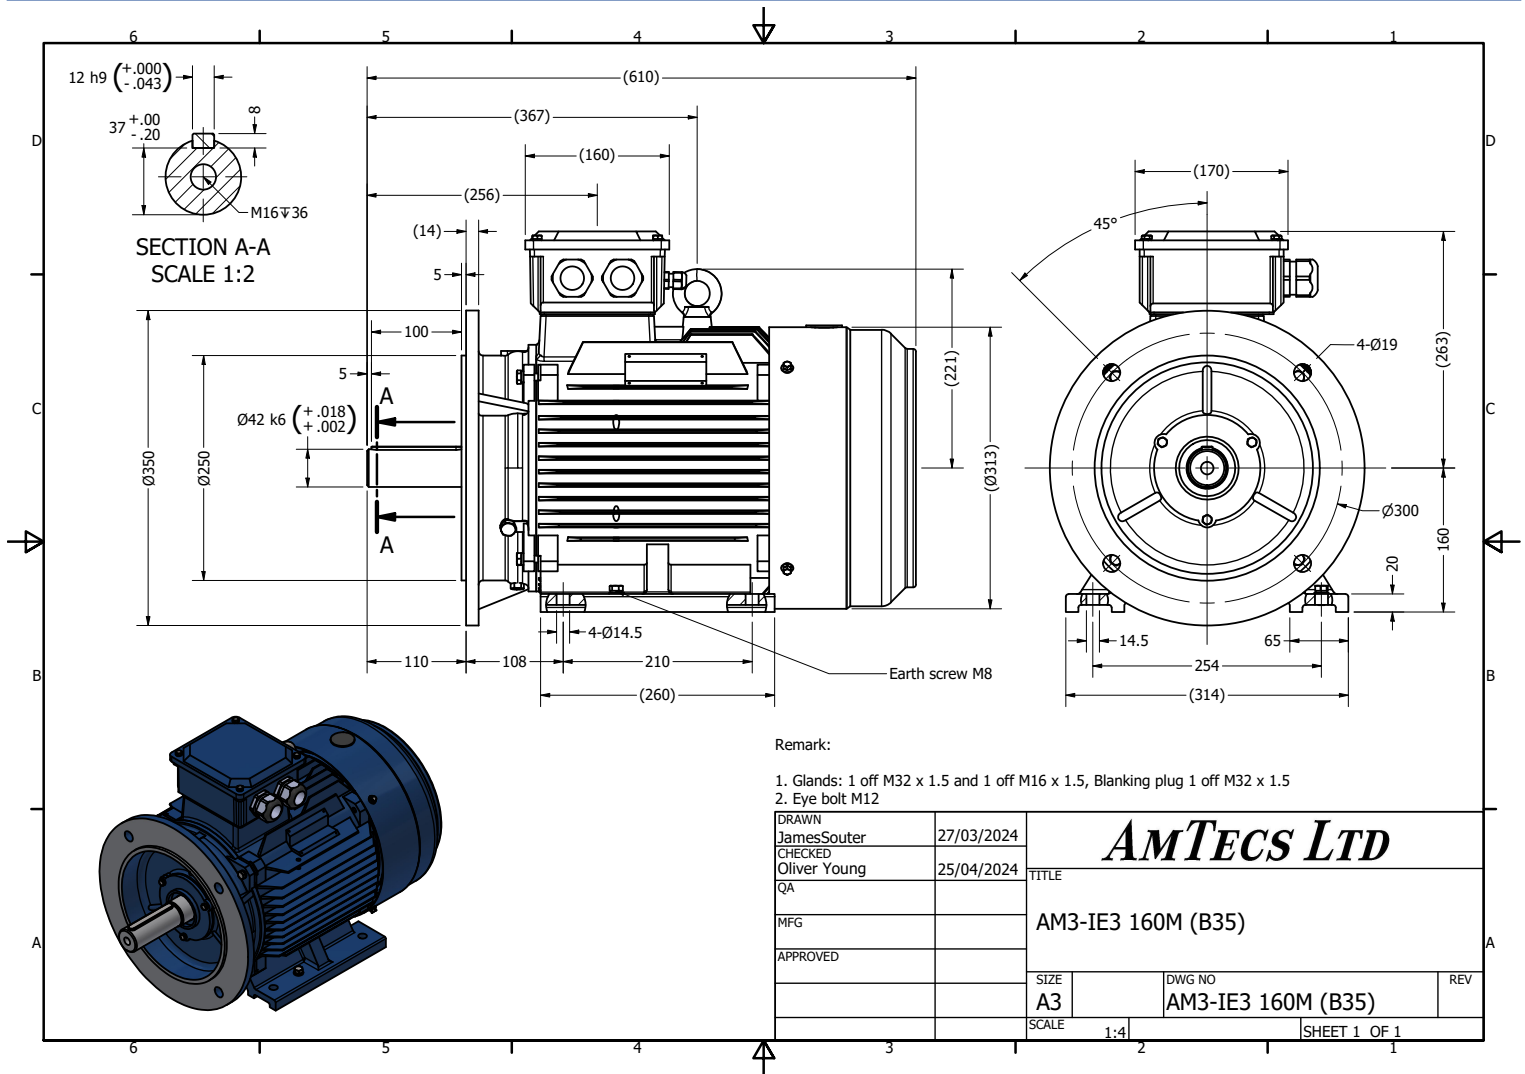

Remark:

1. Glands: 1 off M32 x 1.5 and 1 off M16 x 1.5, Blanking plug 1 off M32 x 1.5
2. Eye bolt M12

DRAWN	JamesSouter	27/03/2024	AMTECS LTD	
CHECKED	Oliver Young	25/04/2024		
QA			TITLE	
MFG			AM3-IE3 160M (B35)	
APPROVED			REV	
			SIZE	DWG NO
			A3	AM3-IE3 160M (B35)
			SCALE	1:4
				SHEET 1 OF 1

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AM3-IE3 160M6
Rated power	7.5 kW S1 Duty
Speed	975 rpm
Voltage	400V / 690V
Frequency	50 Hz
Connection	Delta / Star
Full load current	15.6 A / 9 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M32 x 1.5
Construction	Cast Iron
Weight	120 Kg
Type number	
Warranty	

Efficiency class	IE3
Load data	100%
Efficiency	89.1 %
Power factor	0.78
Sound pressure level (1m)	73 dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	
Full load torque	73.5 Nm
Starting / Full load torque	2.4
Pull up / Full load torque	
Pull out / Full load torque	2.8

Starting / Full load current (DOL)	7.8
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6309
Bearing NDE	6209

MM Engineering Services Ltd	
Unit 32	
Bradford Chamber Business Park	
Bradford, BD4 8BX	
Tel: +44 (0) 1274 288777	
	sales@mmengservices.co.uk
	www.mmengservices.co.uk