


AMA3-IE3 100L6 (B14L)

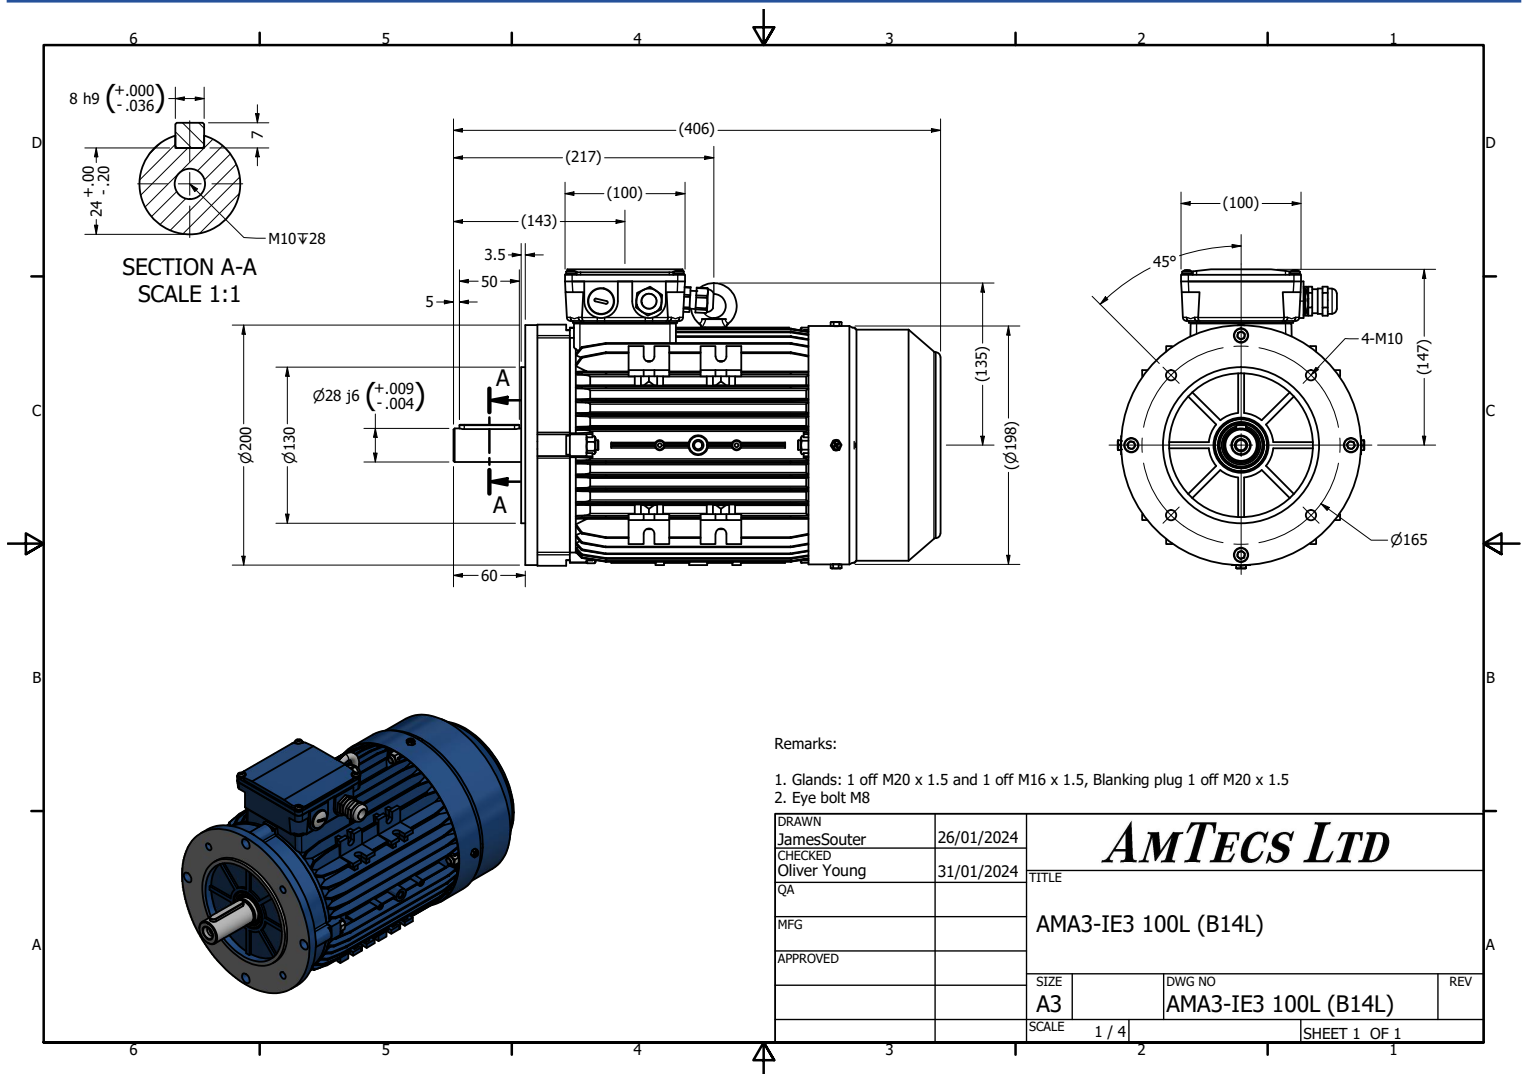

Remarks:

- 1. Glands: 1 off M20 x 1.5 and 1 off M16 x 1.5, Blanking plug 1 off M20 x 1.5
- 2. Eye bolt M8

DRAWN James Souter	26/01/2024	AMTECS LTD		
CHECKED Oliver Young	31/01/2024	TITLE		
QA		AMA3-IE3 100L (B14L)		
MFG				
APPROVED				
		SIZE A3	DWG NO AMA3-IE3 100L (B14L)	REV
		SCALE 1 / 4	SHEET 1 OF 1	

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AMA3-IE3 100L6
Rated power	1.5 kW S1 Duty
Speed	960 rpm
Voltage	220V / 400V
Frequency	50 Hz
Connection	Delta / Star
Full load current	6.25 A / 3.59 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M20 x 1.5
Construction	Aluminium
Weight	30 Kg
Type number	
Warranty	

Efficiency class	IE3
Load data	100%
Efficiency	82.5 %
Power factor	0.73
Sound pressure level (1m)	53 dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	
Full load torque	14.9 Nm
Starting / Full load torque	2.6
Pull up / Full load torque	
Pull out / Full load torque	3.1

Starting / Full load current (DOL)	6.5
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6206
Bearing NDE	6206

MM Engineering Services Ltd	
Unit 32	
Bradford Chamber Business Park	
Bradford, BD4 8BX	sales@mmengservices.co.uk
Tel: +44 (0) 1274 288777	www.mmengservices.co.uk