


AM3-IE3 100L4 (B3)

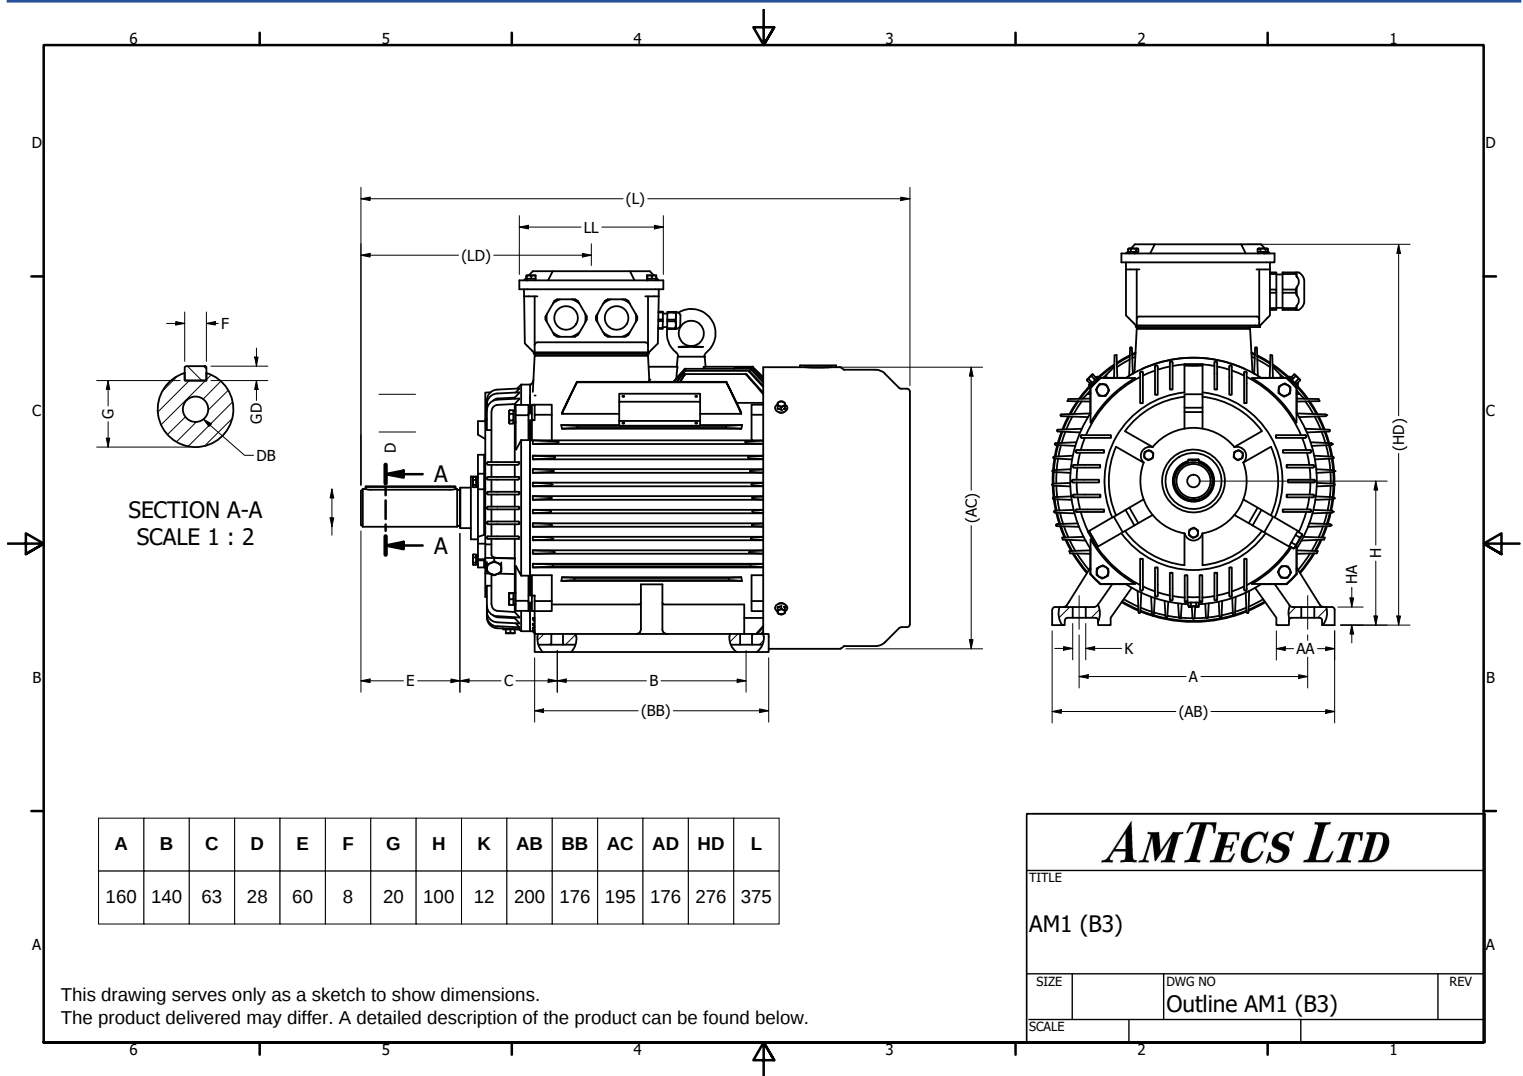

Specification
Manufacturer
Motor type
Rated power
Speed
Voltage
Frequency
Connection
Full load current
No-load current
Enclosure
Insulation class
Max. ambient temp
Max. altitude
Comment
Cable entry
Construction
Weight
Type number
Warranty

IEC 60034-1
AmTecs
AM3-IE3 100L4
2.2 kW S1 Duty
1435 rpm
220V / 400V
50 Hz
Delta / Star
8.11 A / 4.68 A
IP55
F (temp. rise B)
40 °C
1000 mtr above sea level
M20 x 1.5
Cast Iron
44 Kg

Efficiency class
Load data
Efficiency
Power factor
Sound pressure level (1m)
Resistance R20 (open)
Resistance R20 (Delta)

Full load torque
Starting / Full load torque
Pull up / Full load torque
Pull out / Full load torque

IE3
100%
86.7 %
0.78
56 dB(A)

14.6 Nm
2.5
3.5

Starting / Full load current (DOL) **7.2**
Starting / Full load current (Y/D)
Rotor Inertia
Bearing DE **6206**
Bearing NDE **6206**

MM Engineering Services Ltd Unit 32 Bradford Chamber Business Park Bradford, BD4 8BX Tel: +44 (0) 1274 288777	
	sales@mmengservices.co.uk www.mmengservices.co.uk