# AMAS-SR 63G4 (B34L)

AMTECS

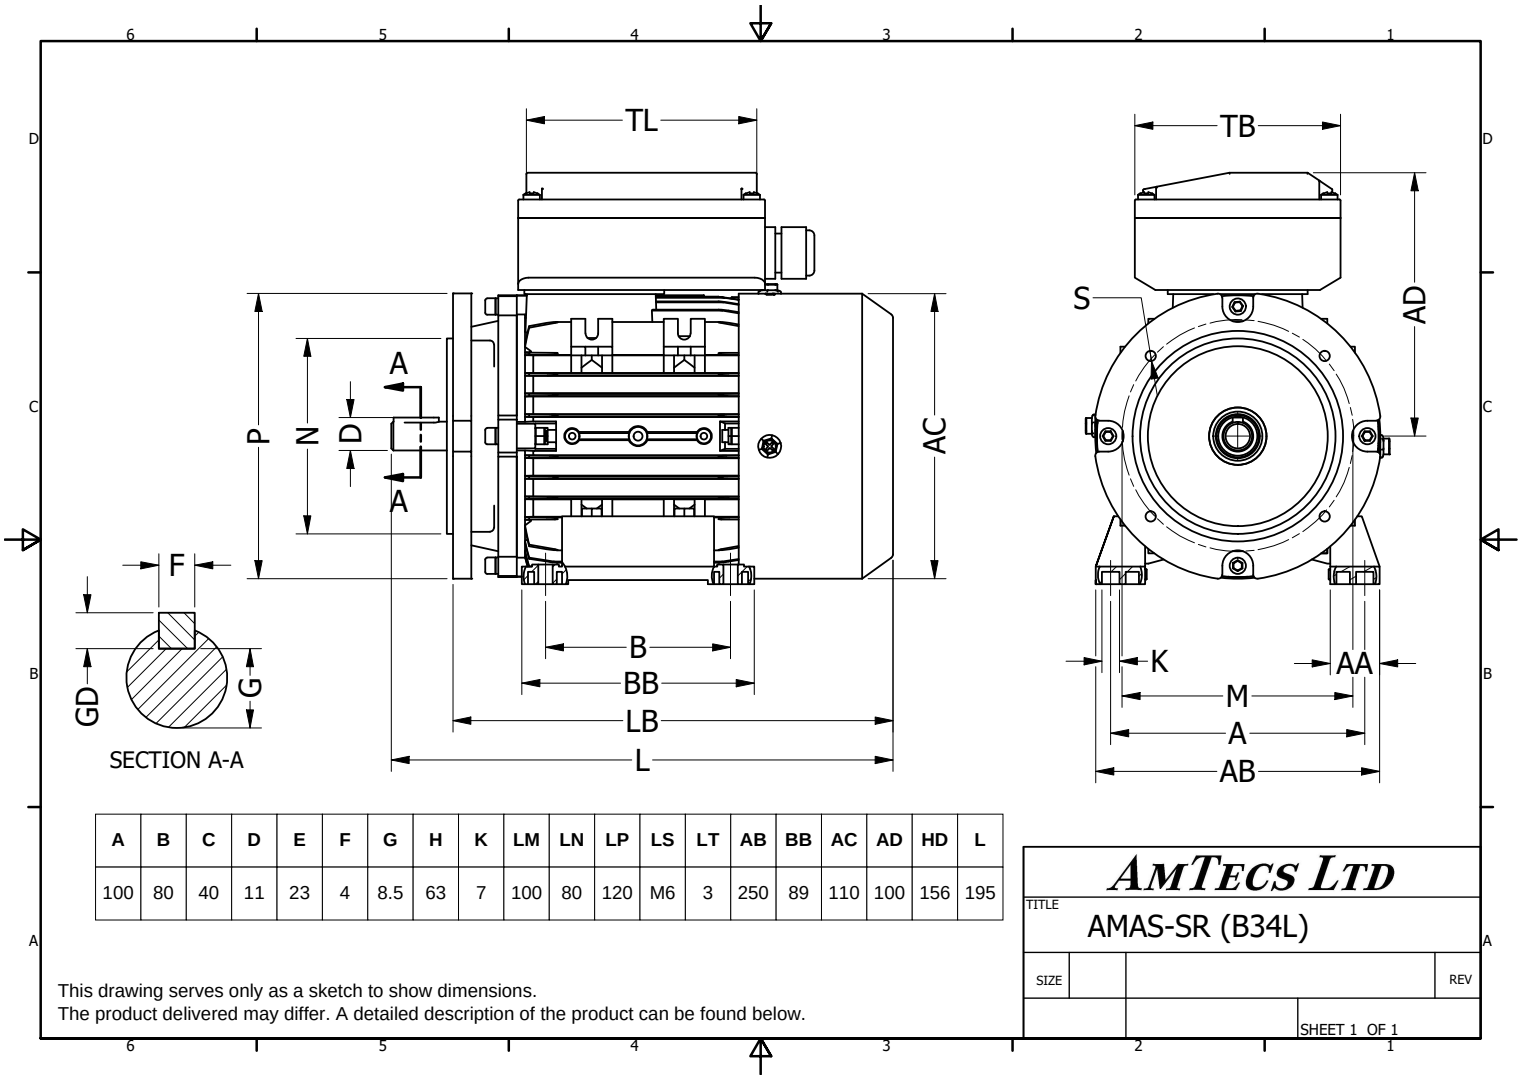


| A | B | C | D | E | F | G | H | K | LM | LN | LP | LS | LT | AB | BB | AC | AD | HD | L |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 100 | 80 | 40 | 11 | 23 | 4 | 8.5 | 63 | 7 | 100 | 80 | 120 | M6 | 3 | 250 | 89 | 110 | 100 | 156 | 195 |

This drawing serves only as a sketch to show dimensions.
The product delivered may differ. A detailed description of the product can be found below.

AMTECS LTD

TITLE AMAS-SR (B34L)

SIZE | REV | SHEET 1 OF 1

| | | | |
|---|---|---|---|
| Specification | **IEC 60034-1** | Efficiency class | **IE1** |
| Manufacturer | **AmTecs** | Load data | 100% |
| Motor type | **AMAS-SR 63G4** | Efficiency | **60** % |
| Rated power | **0.18** kW **S1** Duty | Power factor | **0.92** |
| Speed | **1370** rpm | Sound pressure level (1m) | **67** dB(A) |
| Voltage | **220V** | Resistance R20 (open) | |
| Frequency | **50** Hz | Resistance R20 (Delta) | |
| Connection | **Single Phase** | | |
| Full load current | **1.65 A** | Full load torque | **1.27** Nm |
| No-load current | | Starting / Full load torque | **2.5** |
| Enclosure | **IP55** | Pull up / Full load torque | |
| Insulation class | **F (temp. rise B)** | Pull out / Full load torque | **1.8** |
| Max. ambient temp | **40** °C | | |
| Max. altitude | **1000** mtr above sea level | | |
| Comment | | | |
| Cable entry | **M20 x 1.5** | Starting / Full load current (DOL) | |
| Construction | **Aluminium** | Starting / Full load current (Y/D) | |
| Weight | **4.7** Kg | Rotor Inertia | |
| Type number | | Bearing DE | **6201** |
| Warranty | | Bearing NDE | **6201** |
| Run Capacitor | **10uf/450V** | | |
| Start Capacitor | **50uf/300V** | | |


**AmTecs Ltd**
Charnham Park, Hungerford
Berkshire, RG17 0YT
Tel: +44 (0) 1488 686970
Fax: +44 (0) 1488 686968
sales@amtecs.co.uk
www.amtecs.co.uk



*We make all efforts to better our products. Versions, technical data and figures could be changed therefore. They are not binding before written confirmation.*