


AMA3-IE3 132S4 (B34S)

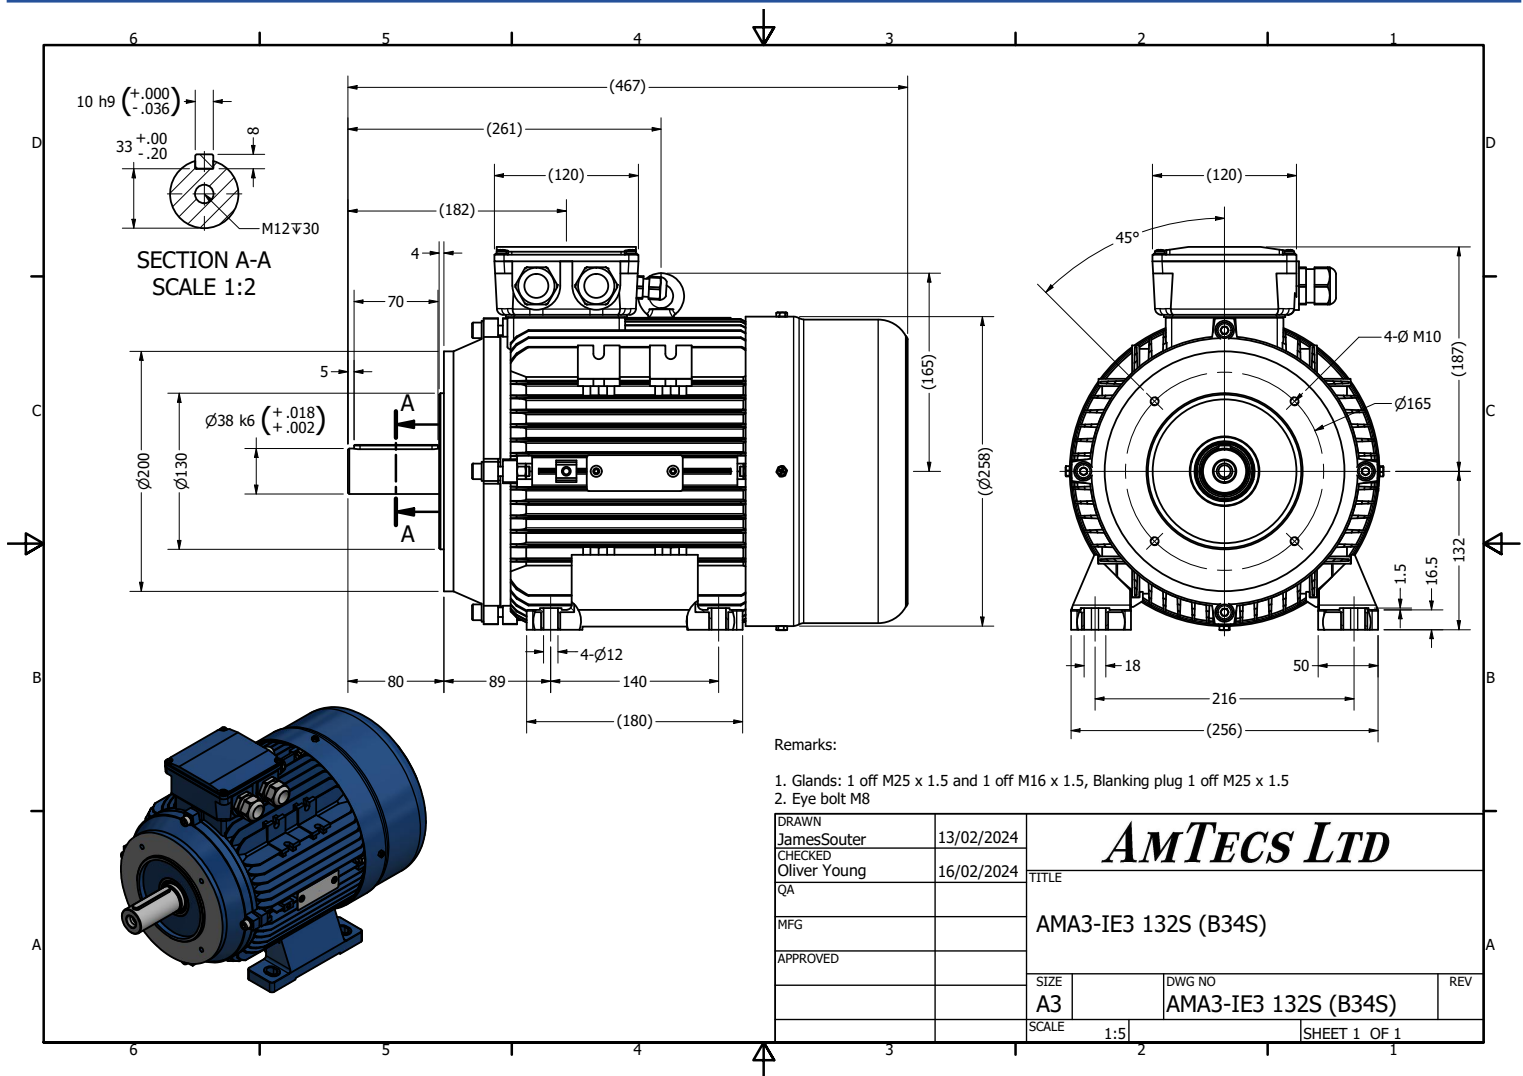

Remarks:

1. Glands: 1 off M25 x 1.5 and 1 off M16 x 1.5, Blanking plug 1 off M25 x 1.5
2. Eye bolt M8

DRAWN James Souter	13/02/2024	AMTECS LTD		
CHECKED Oliver Young	16/02/2024	TITLE		
QA		AMA3-IE3 132S (B34S)		
MFG		SIZE A3	DWG NO AMA3-IE3 132S (B34S)	REV
APPROVED		SCALE 1:5	SHEET 1 OF 1	

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AMA3-IE3 132S4
Rated power	5.5 kW S1 Duty
Speed	1460 rpm
Voltage	400V / 690V
Frequency	50 Hz
Connection	Delta / Star
Full load current	10.7 A / 6.19 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M25 x 1.5
Construction	Aluminium
Weight	54.5 Kg
Type number	
Warranty	

Efficiency class	IE3
Load data	100%
Efficiency	89.6 %
Power factor	0.83
Sound pressure level (1m)	61 dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	
Full load torque	36 Nm
Starting / Full load torque	2.8
Pull up / Full load torque	
Pull out / Full load torque	3.6
Starting / Full load current (DOL)	8.6
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6308
Bearing NDE	6308

MM Engineering Services Ltd Unit 32 Bradford Chamber Business Park Bradford, BD4 8BX Tel: +44 (0) 1274 288777	sales@mmengservices.co.uk www.mmengservices.co.uk
---	--