


AMAB-IE3 80G2 (B34L)

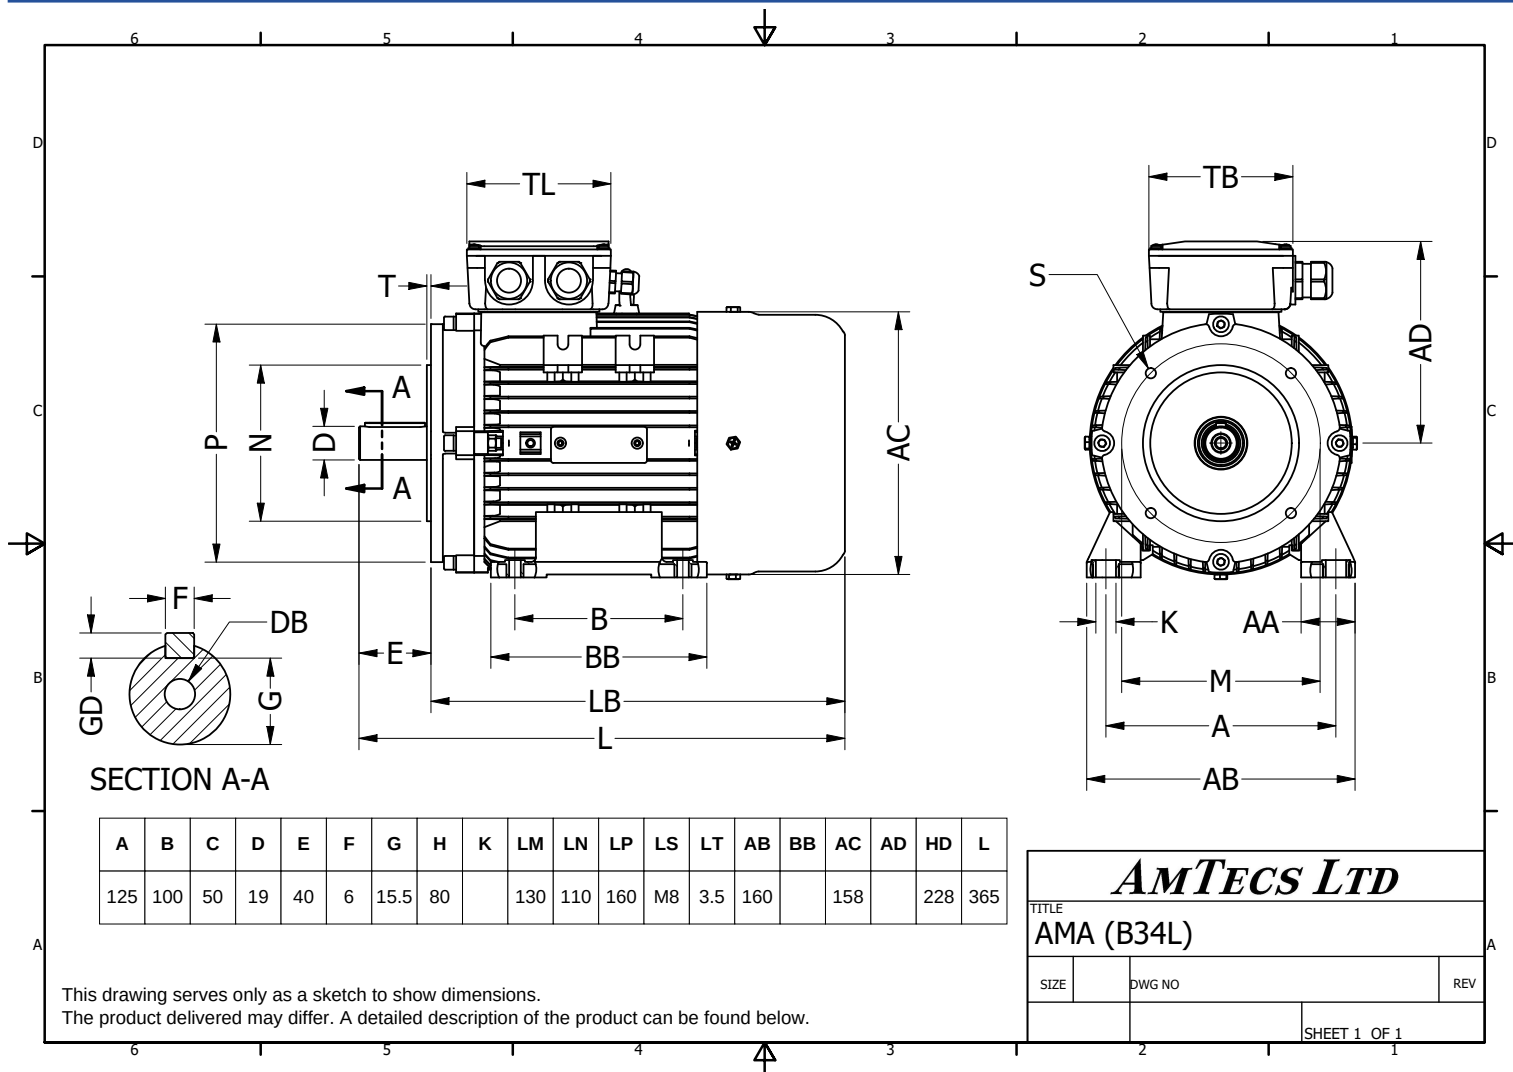

This drawing serves only as a sketch to show dimensions.
The product delivered may differ. A detailed description of the product can be found below.

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AMAB-IE3 80G2
Rated power	1.1 kW S1 Duty
Speed	2910 rpm
Voltage	220V / 400V
Frequency	50 Hz
Connection	Delta / Star
Full load current	4.02 A / 2.31 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M20x1.5
Construction	Aluminium
Weight	12.6 Kg
Type number	
Warranty	
Brake Torque	8 (Nm)
Brake Response	0.3 (ms)
Brake Power	28 (W)
Brake Voltage	99

Efficiency class	IE3
Load data	100%
Efficiency	82.7 %
Power factor	0.83
Sound pressure level (1m)	65 dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	
Full load torque	3.61 Nm
Starting / Full load torque	2.2
Pull up / Full load torque	
Pull out / Full load torque	2.3

Starting / Full load current (DOL)	7.6
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6204
Bearing NDE	6204

MM Engineering Services Ltd	
Unit 32	
Bradford Chamber Business Park	
Bradford, BD4 8BX	sales@mmengservices.co.uk
Tel: +44 (0) 1274 288777	www.mmengservices.co.uk