


DATA SHEET FOR THREE PHASE MOTOR PART NUMBER 3RL0057

- **Type of protection** II 2G Ex db(eb) IIC T6...T4 Gb IP55 zone 1
- **(option II 2D Ex tb IIIC T85°C... T 135°C Db IP 66**
- **Ambient temperature**
-20 +60°C for **T4** ,-20 +50°C for **T5**, -20 + 40°C for **T6**
Altitude above sea level 1000m
- **Standard specification** IEC,ISO,EN
- **Certificate** : TUV IT13 ATEX 039X
- **Relative humidity** : 90%

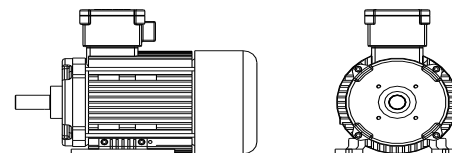

ELECTRICAL DATA			GENERAL DATA	
Frequency (Hz) ±2%	50	60	Frame size	132
Voltage ±5%	400/690	460/796	Type of construction	IMB 3/5/35/14/34
Power (Kw)	7,5	8,6	Weight (kg)	71
Motor speed (rpm)	1450	1668	Frame and Tbox material	Aluminium EN46100
Current (A) at V 400/690	14,4/8,3		Degree protection	IP 55 or IP66
Current (A) at V 460/795		14,4/8,3	Insulation	F class
Torque (N.m)	49,5	42,07	Duty	S1
Efficiency IE3	90,4		Cable entry	N.1 M20 X 1,5 N.1 M32 X 1,5
Power factor	0,84	0,84	Cooling type	IC411
Starting/rated motor current	6,6			
Starting /rated motor torque	2,4			
PTC temperature (°C)	120°C FOR T4/ 90°C FOR T5/ 70°C FOR T6- MANDATORY FOR INVERTER DUTY			

MECHANICAL DATA	
Moment of inertia Kg m²	0,03205
Bearings	6308 2Z
Max axial load	850
Max radial load	1941
Bearings maintenance	40.000 h
Noise level (dB)	78