


DATA SHEET FOR THREE PHASE MOTOR PART NUMBER 3RL0060

- **Type of protection** II 2G Ex db(eb) IIC T6...T4 Gb IP55 zone 1
 - (option II 2D Ex tb IIIC T 135°C Db IP 66)
- **Ambient temperature**
- -20 +60°C for **T4** , -20 +50°C for **T5**, -20 + 40°C for **T6**
- **Altitude above sea level** 1000m
- **Standard specification** IEC,ISO,EN
- **Certificate** : TUV IT13 ATEX 039X
- **Relative humidity** : 90%

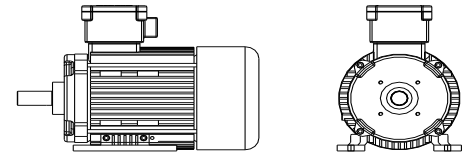

ELECTRICAL DATA			GENERAL DATA	
Frequency (Hz) ±2%	50	60	Frame size	160
Voltage ±5%	400/690	460/795	Type of construction	IMB 3/5/35/14/34
Power (Kw)	15	17,3	Weight (kg)	115
Motor speed (rpm)	1450	1667	Frame and Tbox material	Aluminium EN46100
Current (A) at V 400/690	27,5/15,8		Degree protection	IP 55 or IP66
Current (A) at V 460/795		27,5/15,8	Insulation	F class
Torque (N.m)	96,2	81,77	Duty	S1
Efficiency IE3	92		Cable entry	N.1 M20 X 1,5 N.1 M32 X 1,5
Power factor	0,85	0,85	Cooling type	IC411
Starting/rated motor current	5,8			
Starting /rated motor torque	2,6			
PTC temperature (°C)	120°C FOR T4 /90°C FOR T5 /70 °C FOR T6-		MANDATORY FOR INVERTER DUTY	

MECHANICAL DATA	
Moment of inertia Kg m²	0,107
Bearings	6309 2Z
Max axial load	1000
Max radial load	2421
Bearings maintenance	40.000 h
Noise level (dB)	78