


DATA SHEET FOR THREE PHASE MOTOR PART NUMBER 3 RL0064

- **Type of protection** II 2G Ex db(eb) IIC T6...T4 Gb IP55 zone 1
- **(option II 2D Ex tb IIIC T85°C... T 135°C Db IP 66**
- **Ambient temperature**
-20 +60°C for **T4** ,-20 +50°C for **T5**, -20 + 40°C for **T6**
Altitude above sea level 1000m
- **Standard specification** IEC,ISO,EN
- **Certificate** : TUV IT13 ATEX 039X
- **Relative humidity** : 90%

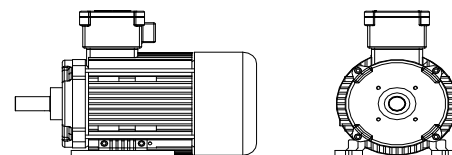

ELECTRICAL DATA			GENERAL DATA	
Frequency (Hz) ± 2%	50	60	Frame size	160
Voltage ±5%	400/690	460/795	Type of construction	IMB 3/5/35/14/34
Power (Kw)	7,5	8,80	Weight (kg)	106
Motor speed (rpm)	965	1110	Frame and Tbox material	Aluminium EN46100
Current (A) at V 400/690	15,9/9		Degree protection	IP 55 or IP66
Current (A) at V 460/796		15,9/9	Insulation	F class
Torque (N.m)	75,6	60,48	Duty	S1
Efficiency IE3 %	89,1		Cable entry	N.1 M20 X 1,5 N.2 M32 X 1,5
Power factor	0,8	0,8	Cooling type	IC411
Starting/rated motor current	4,5			
Starting /rated motor torque	1,8			
PTC temperature (°C)	120°C FOR T4 /90°C FOR T5 /70 °C FOR T6-		MANDATORY FOR INVERTER DUTY	

MECHANICAL DATA	
Moment of inertia Kg m²	0,08125
Bearings	6309 2Z
Max axial load	1000
Max radial load	2771
Bearings maintenance	40.000 h
Noise level (dB)	78