


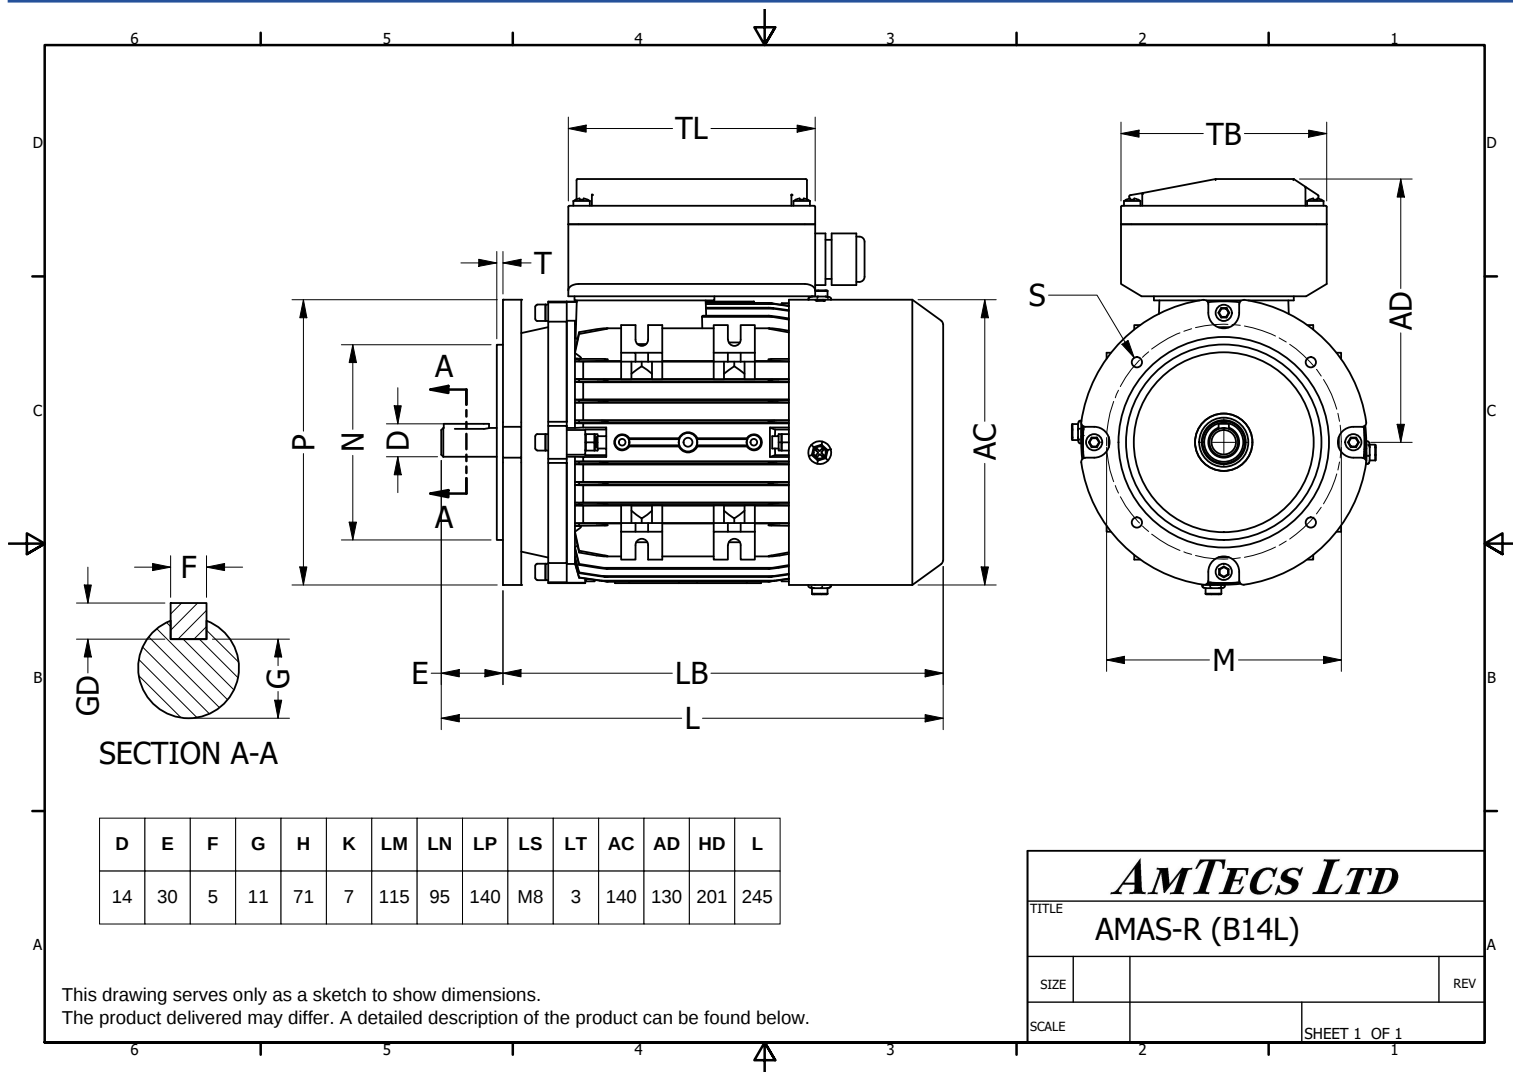

Specification **IEC 60034-1**

Manufacturer **AmTecs**

Motor type **AMAS-R-IE2 71 K2**

Rated power **0.37 kW S1 Duty**

Speed **2800 rpm**

Voltage **220V**

Frequency **50 Hz**

Connection **Single Phase**

Full load current **2.44 A**

No-load current

Enclosure **IP55**

Insulation class **F (temp. rise B)**

Max. ambient temp **40 °C**

Max. altitude **1000 mtr above sea level**

Comment

Cable entry **M20 x 1.5**

Construction **Aluminium**

Weight **6.3 Kg**

Type number

Warranty

Run Capacitor **14uf/450V**

Efficiency class **IE2**

Load data **100%**

Efficiency **69.5 %**

Power factor **0.95**

Sound pressure level (1m) **70 dB(A)**

Resistance R20 (open)

Resistance R20 (Delta)

Full load torque **1.26 Nm**

Starting / Full load torque **0.4**

Pull up / Full load torque

Pull out / Full load torque **1.7**

Starting / Full load current (DOL)

Starting / Full load current (Y/D)

Rotor Inertia

Bearing DE **6202**

Bearing NDE **6202**

Protection Device **Thermal Reset Switch**

#### AmTecs Ltd

Charnham Park, Hungerford  
Berkshire, RG17 0YT

Tel: +44 (0) 1488 686970

Fax: +44 (0) 1488 686968

sales@amtecs.co.uk

www.amtecs.co.uk