


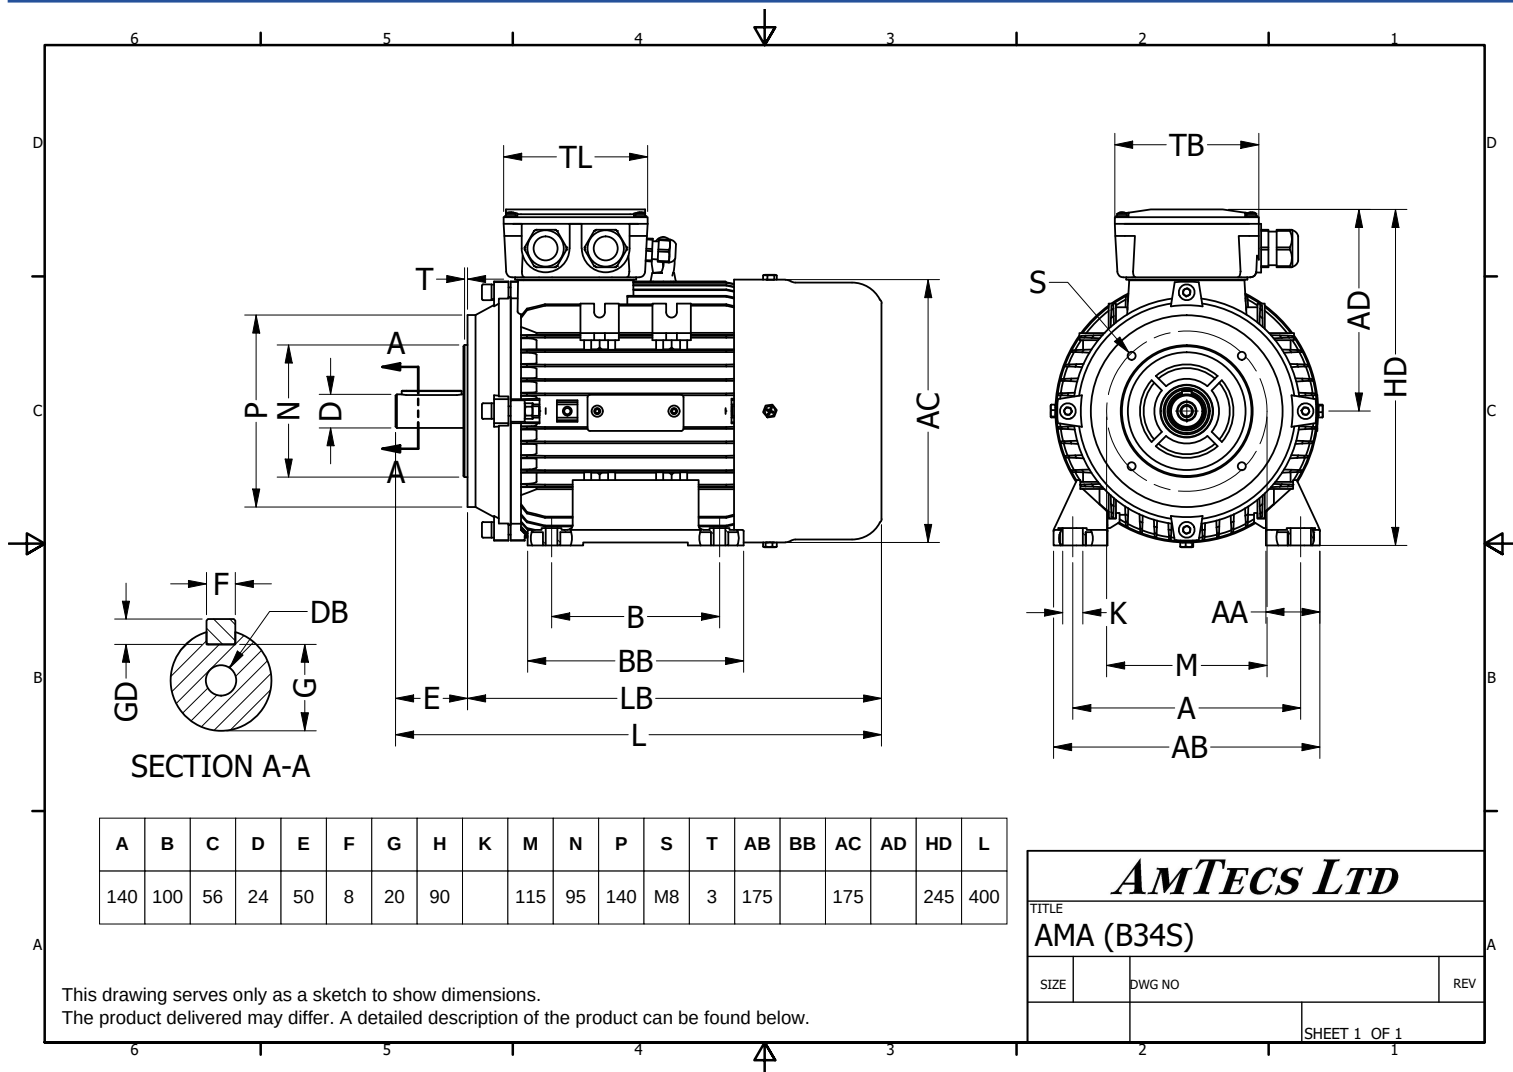

|                   |                          |
|-------------------|--------------------------|
| Specification     | IEC 60034-1              |
| Manufacturer      | AmTecs                   |
| Motor type        | AMAB-IE3 90S4            |
| Rated power       | 1.32 kW S1 Duty          |
| Speed             | 1734 rpm                 |
| Voltage           | 277 / 480V               |
| Frequency         | 60 Hz                    |
| Connection        | Delta / Star             |
| Full load current | 4.32 A / 2.48 A          |
| No-load current   |                          |
| Enclosure         | IP55                     |
| Insulation class  | F (temp. rise B)         |
| Max. ambient temp | 40 °C                    |
| Max. altitude     | 1000 mtr above sea level |
| Comment           |                          |
| Cable entry       | M20 x 1.5                |
| Construction      | Aluminium                |
| Weight            | 22 Kg                    |
| Type number       |                          |
| Warranty          |                          |
| Brake Torque      | 15 (Nm)                  |
| Brake Response    | 0.38 (ms)                |
| Brake Power       | 45 (W)                   |
| Brake Voltage     | 99                       |

|                           |          |
|---------------------------|----------|
| Efficiency class          | IE3      |
| Load data                 | 100%     |
| Efficiency                | 84.1 %   |
| Power factor              | 0.76     |
| Sound pressure level (1m) | 75 dB(A) |
| Resistance R20 (open)     |          |
| Resistance R20 (Delta)    |          |

|                             |         |
|-----------------------------|---------|
| Full load torque            | 7.27 Nm |
| Starting / Full load torque | 2.3     |
| Pull up / Full load torque  |         |
| Pull out / Full load torque | 2.3     |

|                                    |      |
|------------------------------------|------|
| Starting / Full load current (DOL) | 7.2  |
| Starting / Full load current (Y/D) |      |
| Rotor Inertia                      |      |
| Bearing DE                         | 6205 |
| Bearing NDE                        | 6205 |

|                                                                                                                               |                                        |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>AmTecs Ltd</b><br>Charnham Park, Hungerford<br>Berkshire, RG17 0YT<br>Tel: +44 (0) 1488 686970<br>Fax: +44 (0) 1488 686968 |                                        |
|                                                                                                                               | sales@amtecs.co.uk<br>www.amtecs.co.uk |