


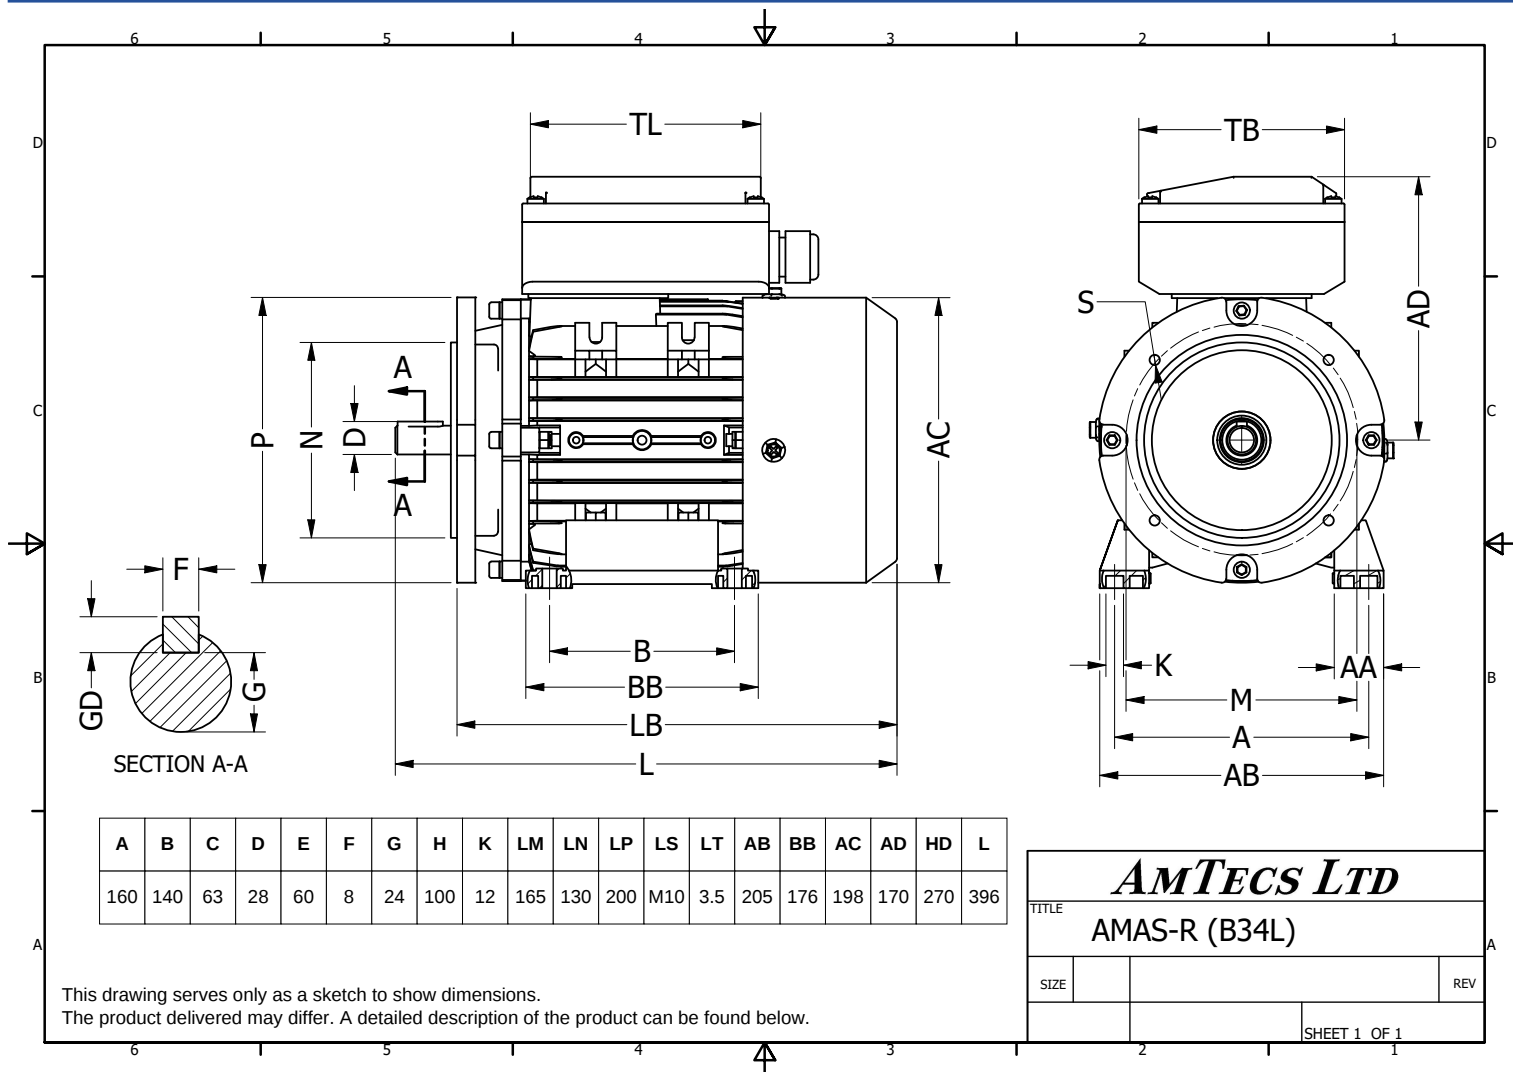

This drawing serves only as a sketch to show dimensions.  
The product delivered may differ. A detailed description of the product can be found below.

|                   |                          |
|-------------------|--------------------------|
| Specification     | IEC 60034-1              |
| Manufacturer      | AmTecs                   |
| Motor type        | AMAS-R-IE2 100 L4        |
| Rated power       | 2.2 kW S1 Duty           |
| Speed             | 1400 rpm                 |
| Voltage           | 220V                     |
| Frequency         | 50 Hz                    |
| Connection        | Single Phase             |
| Full load current | 11.6 A                   |
| No-load current   |                          |
| Enclosure         | IP55                     |
| Insulation class  | F (temp. rise B)         |
| Max. ambient temp | 40 °C                    |
| Max. altitude     | 1000 mtr above sea level |
| Comment           |                          |
| Cable entry       | M20 x 1.5                |
| Construction      | Aluminium                |
| Weight            | 29 Kg                    |
| Type number       |                          |
| Warranty          |                          |
| Run Capacitor     | 60uf/450V                |

|                             |        |
|-----------------------------|--------|
| Efficiency class            | IE2    |
| Load data                   | 100%   |
| Efficiency                  | 84.3 % |
| Power factor                | 0.98   |
| Sound pressure level (1m)   | dB(A)  |
| Resistance R20 (open)       |        |
| Resistance R20 (Delta)      |        |
| Full load torque            | 15 Nm  |
| Starting / Full load torque | 0.3    |
| Pull up / Full load torque  |        |
| Pull out / Full load torque | 1.7    |

|                                    |      |
|------------------------------------|------|
| Starting / Full load current (DOL) |      |
| Starting / Full load current (Y/D) |      |
| Rotor Inertia                      |      |
| Bearing DE                         | 6206 |
| Bearing NDE                        | 6206 |

Protection Device Thermal Reset Switch

|                                                                                                                        |                                        |
|------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| AmTecs Ltd<br>Charnham Park, Hungerford<br>Berkshire, RG17 0YT<br>Tel: +44 (0) 1488 686970<br>Fax: +44 (0) 1488 686968 | sales@amtecs.co.uk<br>www.amtecs.co.uk |
|------------------------------------------------------------------------------------------------------------------------|----------------------------------------|