


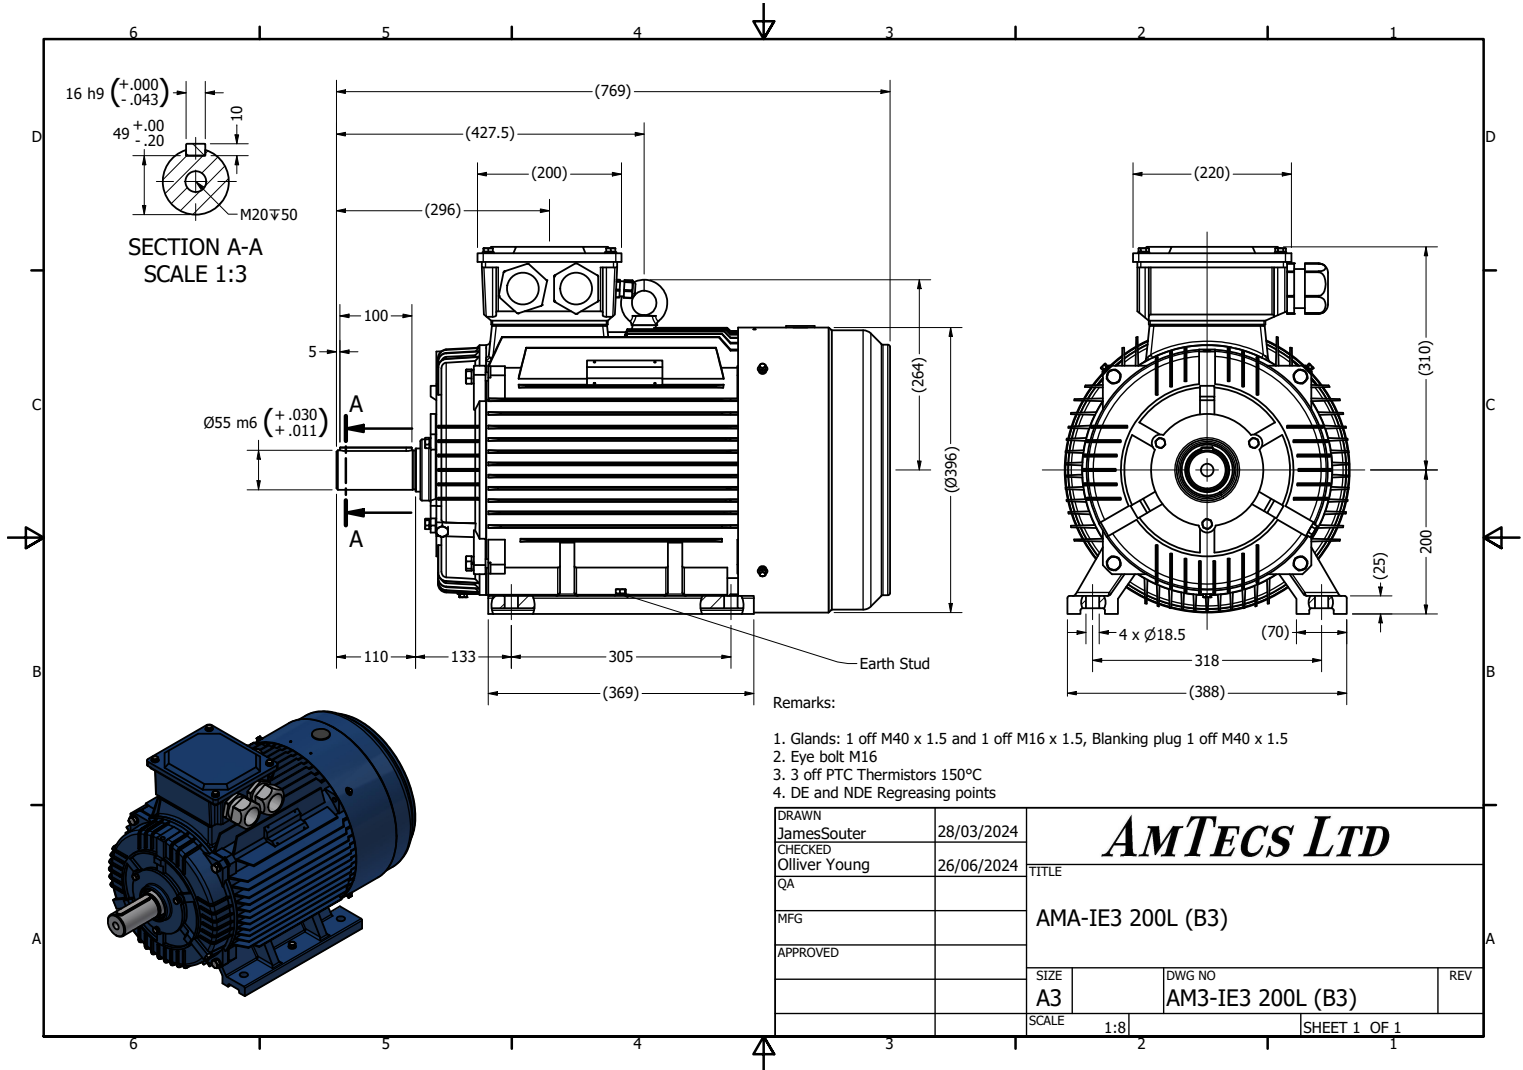

Specification

Manufacturer

Motor type

Rated power

Speed

Voltage

Frequency

Connection

Full load current

No-load current

Enclosure

Insulation class

Max. ambient temp

Max. altitude

Comment

Cable entry

Construction

Weight

Type number

Warranty

IEC 60034-1

AmTecs

AM3-IE3 200L4

30 kW S1 Duty

1475 rpm

400V / 690V

50 Hz

Delta / Star

53.8 A / 31.2 A

IP55

F (temp. rise B)

40 °C

1000 mtr above sea level

M40 x 1.5

Cast Iron

280 Kg

Efficiency class

Load data

Efficiency

Power factor

Sound pressure level (1m)

Resistance R20 (open)

Resistance R20 (Delta)

Full load torque

Starting / Full load torque

Pull up / Full load torque

Pull out / Full load torque

Starting / Full load current (DOL)

Starting / Full load current (Y/D)

Rotor Inertia

Bearing DE

Bearing NDE

IE3

100%

93.6 %

0.86

76 dB(A)

194.2 Nm

3

3.7

8.6

6312

6312

AmTecs Ltd	
Charnham Park, Hungerford	
Berkshire, RG17 0YT	
Tel: +44 (0) 1488 686970	sales@amtecs.co.uk
Fax: +44 (0) 1488 686968	www.amtecs.co.uk