


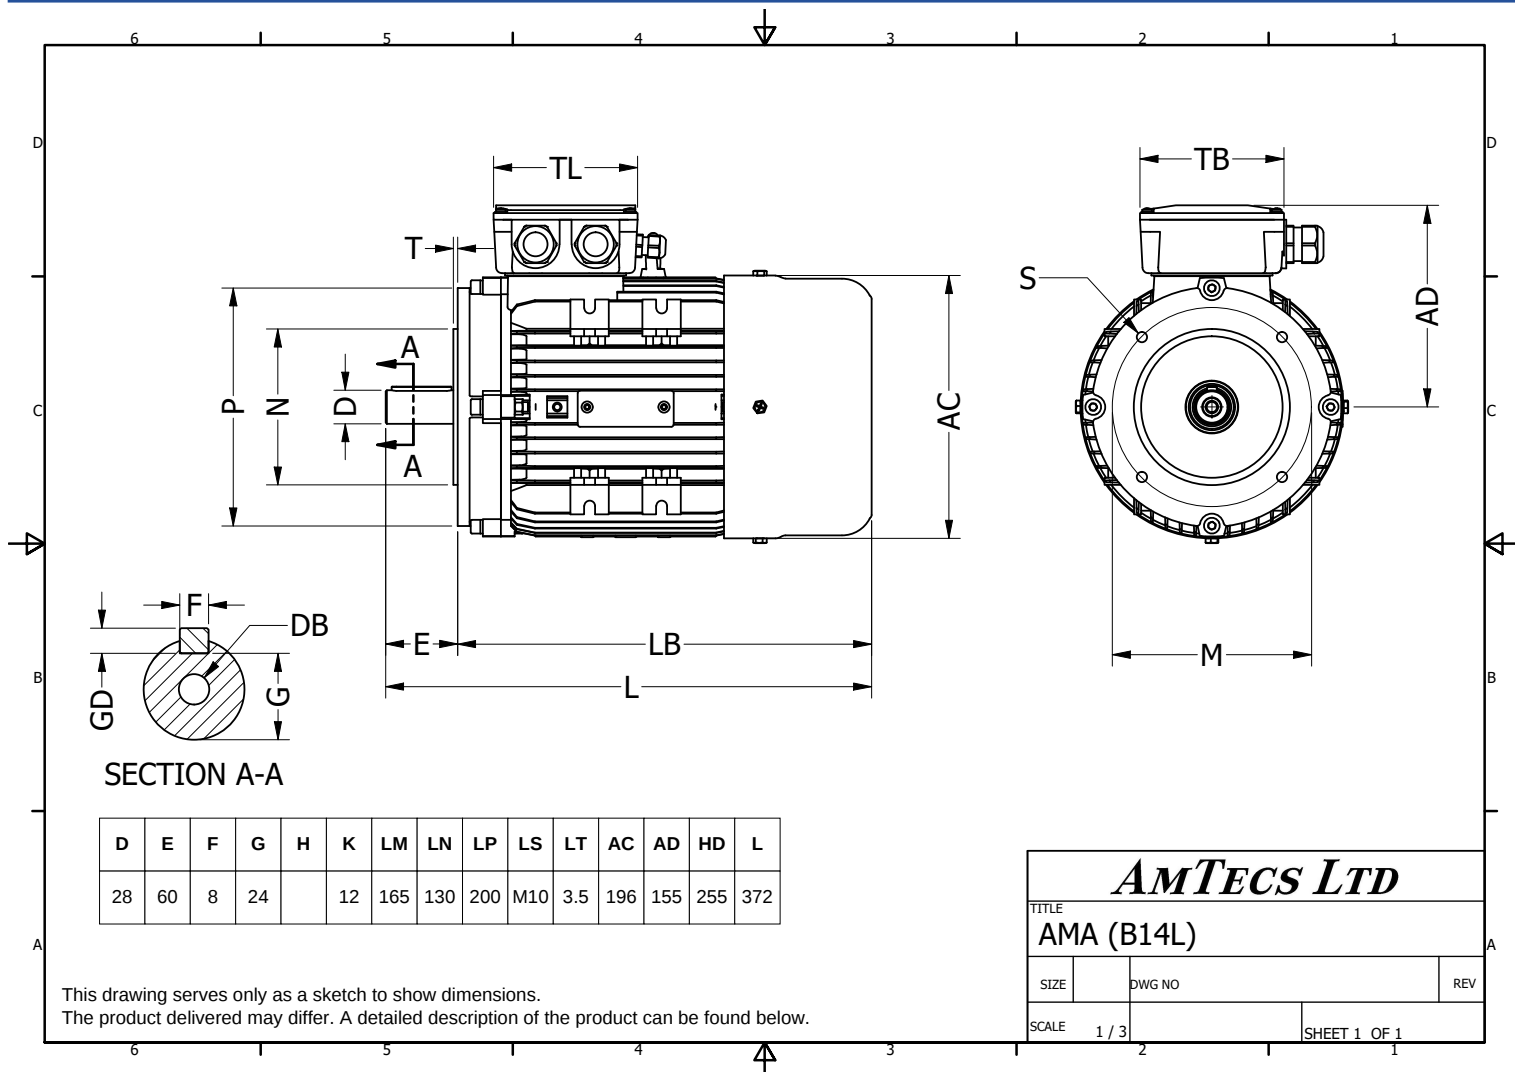

**Specification**  
**Manufacturer** AmTecs  
**Motor type** AMA-IE2 100LX4  
**Rated power** 3 kW S1 Duty  
**Speed** 1440 rpm  
**Voltage** 220V / 400V  
**Frequency** 50 Hz  
**Connection** Delta / Star  
**Full load current** 10.7 A / 6.18 A  
**No-load current**  
**Enclosure** IP55  
**Insulation class** F (temp. rise B)  
**Max. ambient temp** 40 °C  
**Max. altitude** 1000 mtr above sea level  
**Comment**  
**Cable entry** M20 x 1.5  
**Construction** Aluminium  
**Weight** 37 Kg  
**Type number**  
**Warranty**

**Efficiency class** IE2  
**Load data** 100%  
**Efficiency** 85.5 %  
**Power factor** 0.82  
**Sound pressure level (1m)** 56 dB(A)  
**Resistance R20 (open)**  
**Resistance R20 (Delta)**

**Full load torque** 19.9 Nm  
**Starting / Full load torque** 2.2  
**Pull up / Full load torque**  
**Pull out / Full load torque** 2.3

**Starting / Full load current (DOL)** 7  
**Starting / Full load current (Y/D)**  
**Rotor Inertia**  
**Bearing DE** 6206  
**Bearing NDE** 6206

|                                                                                                                               |                                        |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>AmTecs Ltd</b><br>Charnham Park, Hungerford<br>Berkshire, RG17 0YT<br>Tel: +44 (0) 1488 686970<br>Fax: +44 (0) 1488 686968 |                                        |
|                                                                                                                               | sales@amtecs.co.uk<br>www.amtecs.co.uk |