


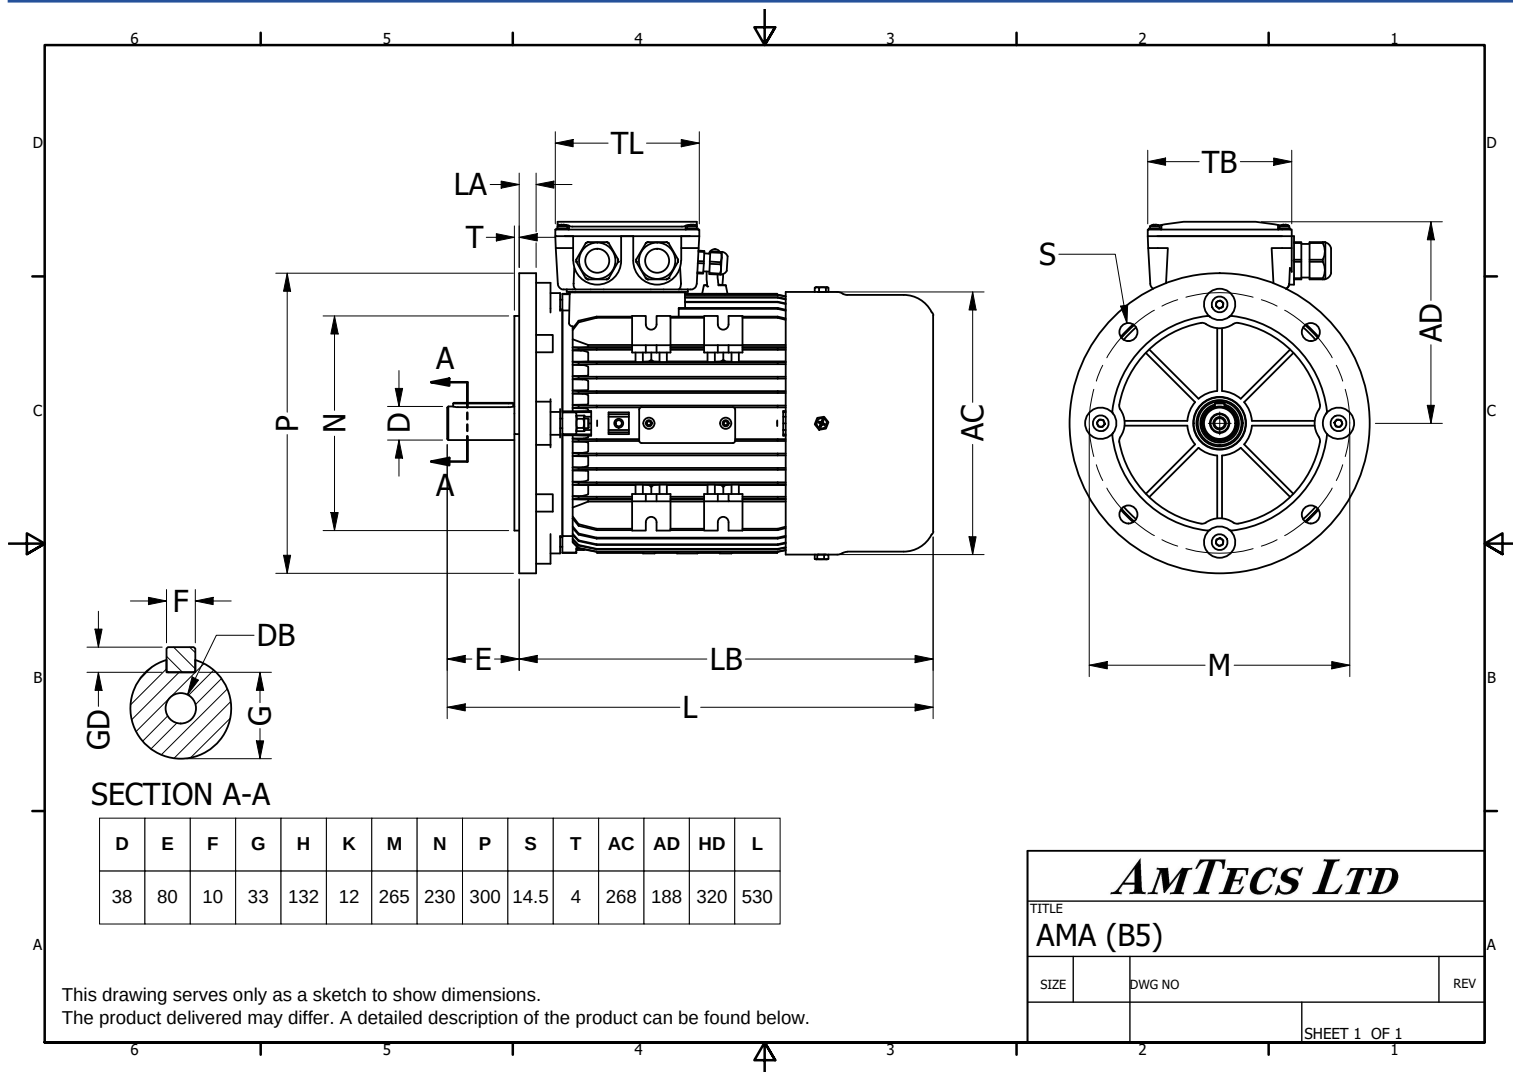

**Specification**  
**Manufacturer** AmTecs  
**Motor type** AMAH-IE3 132M2  
**Rated power** 9.2 kW S1 Duty  
**Speed** 2930 rpm  
**Voltage** 400V / 690V  
**Frequency** 50 Hz  
**Connection** Delta / Star  
**Full load current** 16.7 A / 9.64 A  
**No-load current**  
**Enclosure** IP55  
**Insulation class** F (temp. rise B)  
**Max. ambient temp** 40 °C  
**Max. altitude** 1000 mtr above sea level  
**Comment**  
**Cable entry** M25 x 1.5  
**Construction** Aluminium  
**Weight** 55 Kg  
**Type number**  
**Warranty**

**Efficiency class** IE3  
**Load data** 100%  
**Efficiency** 90.6 %  
**Power factor** 0.88  
**Sound pressure level (1m)** 70 dB(A)  
**Resistance R20 (open)**  
**Resistance R20 (Delta)**  
**Full load torque** 30 Nm  
**Starting / Full load torque** 2.2  
**Pull up / Full load torque**  
**Pull out / Full load torque** 3.2

**Starting / Full load current (DOL)** 8.8  
**Starting / Full load current (Y/D)**  
**Rotor Inertia**  
**Bearing DE** 6308  
**Bearing NDE** 6308

**Protection Device** PTC 150

**AmTecs Ltd**

Charnham Park, Hungerford  
Berkshire, RG17 0YT

Tel: +44 (0) 1488 686970

Fax: +44 (0) 1488 686968

sales@amtecs.co.uk

www.amtecs.co.uk